

**AMAZE POWER**

**ASHOK LEYLAND**  
*Koi Manzil Door Nahin*

**LEYPOWER**  
*POWERING YOUR NEEDS*

**SEAMLESS POWER FOR UNSTOPPABLE DREAMS**



**LEYPOWER DIESEL GENERATORS 15 kVA TO 250 kVA**

Powered by Reliable, Rugged & Robust engines | Best-in-class fluid efficiency | Longest oil change interval

 **HINDUJA GROUP**

Ashok Leyland, a trusted brand in power solutions, is now geared up to power your needs sustainably with the all new CPCB IV+ Diesel Gensets ranging from 15 kVA to 250 kVA.

These elegantly designed, silent Diesel Gensets meet the most rigorous emission norms and are available through our extensive network across India.

Ashok Leyland provides comprehensive Powergen solutions, encompassing Genset transportation, loading/unloading, positioning, and installation, covering, earthing, cabling, exhaust piping, room treatment, and obtaining approvals\* including CAMC.

We, at Ashok Leyland, take pride in having powered over 300,000 diesel generators in the last decade for diverse applications such as infrastructure, retail chains, rental, banks, hospitals, petroleum retail outlets, industries, hotels & resorts, educational institutions and others.



Single POC for engine, alternator, panel and installation



Max functionality at better TCO



Silent operations



Extended oil change interval




Bold and vibrant design




Compact size

Proven EGR Technology



Optimised DOC & SCR STRATEGY

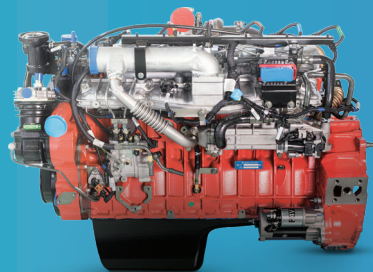

Experience top-tier performance with minimal fluid consumption with our new CPCB IV+ DG set range that gives you unmatched productivity and reliability.

\*Terms and conditions apply

# NEW AGE POWER. AGE OLD TRUST

Power your needs with the state-of-the-art Diesel Gensets from Ashok Leyland

DG MODEL	Unit	LP 15	LP 25	LP 30	LP 35/40	LP 45	LP 60	LP 75/82.5	LP 100	LP 125	LP 160	LP 180	LP 250	
Power rating*	kVA	15	25	30	35/ 40	45	60	75/ 82.5	100	125	160	180	250	
Electric power	kWe	12	20	24	28/ 32	36	48	60/ 66	80	100	128	144	200	
Rated current	A	21	35	42	49/ 56	63	84	104/ 115	139	174	223	250	346	
DG size L X W	mm x mm	1750 X 1000	2000 X 1000	2000 X 1000	2500 X 1200	2500 X 1200	2700 X 1200	2850 X 1300	2850 X 1300	3100 X 1300	3500 X 1400	3500 X 1400	4700 X 1600	
Height (including base)	mm	1200	1350	1350	1450	1450	1510	1510	1610	1610	1850	1850	2020	
DG weight approx.	kg	676	750	750	1090	1100	1380	1417	1900	2050	2210	2280	4500	
Fuel tank capacity	L	55	60	60	140	140	140	190	200	200	250	250	340	
Battery capacity	Ah	90	90	90	90	90	90	90	90	90	110	110	110	
System DC voltage	V	12	12	12	12	12	12	12	12	12	12	12	24	
Engine model		H2G4DM15	P15G4DE25	P15G4DE30	H4G4DE40	H4G4DE45	H4G4DE60	H4G4DE82	H4G4DE100	H6G4DE125	H6G4DE160	H6G4DE180	A6G4DE250	
Engine rated	kW/ hp	14.6/ 19.5	25/ 33.3	28/ 37	39/ 52	42.5/ 56.5	54/ 72	78/ 104	92/ 122	116/ 154	147/ 197	165/ 220	223/ 303	
Aspiration		NA	TCIC	TCIC	TCIC	TCIC	TCIC	TCIC	TCIC	TCIC	TCIC	TCIC	TCIC	
No. of cylinders & configuration		2, Inline	3, Inline	3, Inline	4, Inline	4, Inline	4, Inline	4, Inline	4, Inline	6, Inline	6, Inline	6, Inline	6, Inline	
Bore x Stroke	mm x mm	104 X 118	80 X 98	80 X 98	104 X 113	104 X 113	104 X 113	104 X 118	104 X 118	104 X 118	104 X 118	104 X 118	112 X 135	
Displacement	L	2	1.5	1.5	3.8	3.8	3.8	4	4	6	6	6	8	
Compression ratio		16.5 ± 0.5 : 1	16.5 ± 0.5 : 1	16.5 ± 0.5 : 1	16.5 ± 0.5 : 1	16.5 ± 0.5 : 1	16.5 ± 0.5 : 1	16.5 ± 0.5 : 1	16.5 ± 0.5 : 1	16.5 ± 0.5 : 1	16.5 ± 0.5 : 1	16.5 ± 0.5 : 1	17.5 ± 0.5 : 1	
Lube oil capacity approx.	L	6	4.5	4.5	8.5	8.5	8.5	12	12	18	18	18	28	
Coolant capacity approx.	L	10	11	11	14	14	16	18	20	22	24	24	55	
Governing class		A1	A0	A0	A0	A0	A0	A0	A0	A0	A0	A0	A0	
Governer used		Mechanical	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	
Oil change period		600 hrs or 1 year	500 hrs or 1 year			750 hrs or 1 year								
Lube oil specification		Gulf Leypower XLE												
Generator controller		GC 902					GC 1206							

\* Power Rating @1500 rpm- As per BS 5514/ ISO 3046/ ISO 8528 under standard reference conditions.



## ENGINE



Continuous duty application at 100% load - 24x7



Superior block loading capability



Common rail fuel injection system for enhanced fuel efficiency



Optimum power to weight ratio



Optimised SCR strategy for lesser Adblue consumption



Reduced noise and vibration\*

\*Compared to AL-CPCB Gensets



## SERVICE



Nationwide service network



Round the clock 24x7 assistance



220+ touchpoints PAN India



Easy serviceability



Ease of parts availability



Comprehensive AMCs



## IOT & TELEMATICS



Know your Genset



Monitor performance from anywhere



Schedule DG service visits



Immediate fault diagnosis



Generates prompt alerts



Registered Office: Ashok Leyland Limited, No. 1, Sardar Patel Road Guindy, Chennai - 600032, Tel. - 91 44 2220 6000  
E-mail - reachus@ashokleyland.com | Website - www.ashokleyland.com



Corporate office:  
BNCCI House, 3<sup>rd</sup> Floor, 23, R.N.Mukherjee Road  
Kolkata-700001, West Bengal

AUTHORISED DEALER

HELPLINE 1800-419-1921

