



PRICE LIST

Ref No. RRKL/LP/BCISI/1-1/24
w.e.f. 8th January 2024

THE ONLY INDIAN
WIRE BRAND
TRUSTED BY

90+

COUNTRIES
GLOBALLY



RR KÄBEL
WIRES & CABLES

**AKALMAND BANO,
SAHI CHUNO.**

AKALMAND BANO, SAHI CHUNO.



BUILDING WIRES

RR KÄBEL
WIRES & CABLES

INDIA'S ONLY WIRE WITH
REACH • RoHS
CE • CPR Compliant



SUPEREX FR FR PVC Insulated Single Core Cables



RR Kabel makes Single Core unsheathed Multistrand High Conductivity plain annealed Copper, FR PVC Insulated Industrial Cables in voltage grade upto and including 1100 Volts, as per IS 694 (HSN CODE : 8544)

Size (Sq.mm)	Configuration	Rate/90 mtr	No. of Coils packed in an Outer Box
0.75	24/0.2	1298	24
1.0	14/0.3	1769	20
1.5	22/0.3	2579	12
2.5	36/0.3	4128	12
4.0	56/0.3	6017	8
6.0	84/0.3	8961	4

UNILAY HR FR HR FR PVC Insulated Single Core Cables



RR Kabel makes Single Core unsheathed Multistrand flexible High Conductivity plain annealed copper, HR FR PVC Insulated Industrial Cables in voltage grade upto and including 1100 Volts, as per IS 694 (HSN CODE : 8544)

Size (Sq.mm)	Configuration	Rate/90 mtr	No. of Coils packed in an Outer Box
1.0	37/0.19	1855	20
1.5	37/0.23	2692	12
2.5	61/0.23	4321	12
4.0	61/0.29	6599	8
6.0	91/0.29	9809	8

FIREX LSOH HALOGEN FREE FLAME RETARDANT 90°C, CROSSLINKED



RR Kabel makes Single Core unsheathed Multistrand High Conductivity plain annealed Copper, Cross linked Halogen Free Flame Retardant (HFFR) 90° C Insulated Industrial Cables in voltage grade upto and including 1100 volts, as per IS 17048 (HSN Code: 8544)

Size (Sq.mm)	Configuration	Rate/90 mtr	No. of Coils packed in an Outer Box
1.00	14/0.3	2138	20
1.50	22/0.3	3011	12
2.50	36/0.3	4770	12
4.00	56/0.3	7001	8
6.00	84/0.3	10140	4

* FIREX LSOH - Insulation Conforming to HFI XL 90 as per IS 17048

RR KABEL FR HSF / FR-LSH



RR Kabel makes Single Core unsheathed Multistrand High Conductivity plain annealed Copper, FR PVC/FR-LSH PVC Insulated Industrial Cables in voltage grade upto and including 1100 Volts, As per IS 694 (HSN Code: 8544)

RATE / 200 MTR					
Size (Sq.mm)	Configuration	AMPS	RR KABEL FR HSF FR PVC INSULATION	RR KABEL FR-LSH FR-LSH PVC INSULATION	No. of Coils packed in an Outer Box
0.75	24/0.2	8	2967	3069	12
1.0	32/0.2	13	3874	4010	12
1.5	30/0.25	17	5602	5794	8
2.5	50/0.25	24	9120	9442	6
4.0	56/0.3	30	14023	14514	4
6.0	84/0.3	38	20853	21530	2

LSOH-FR



RR Kabel makes Multistrand High Conductivity Plain Copper Thermoplastic Halogen Free Flame Retardent (HFFR) 70° C Insulated Single Core Unsheathed Industrial Cables in Voltage Grade Upto and Including 1100 Volts, As Per IS 17048 (HSN CODE : 8544)


Size (Sq.mm)	Configuration	AMPS	Unit	Rate	No. of Coils packed in an Outer Box
0.75	24/0.2	8	180 Mtr	3083	12
1.0	32/0.2	13	180 Mtr	3886	12
1.5	30/0.25	17	180 Mtr	5467	8
2.5	50/0.25	24	180 Mtr	8847	6
4.0	56/0.25	30	180 Mtr	13565	4
6.0	84/0.3	38	180 Mtr	20114	2

FR HSF



RR Kabel makes Multistrand High Conductivity Plain Copper FR PVC Insulated Single Core Unsheathed Industrial Cables in Voltage Grade Upto and Including 1100 Volts, As Per IS 694 (HSN CODE : 8544)

Size (Sq.mm)	Configuration	AMPS	Unit	Rate	No. of Coils packed in an Outer Box
0.75	24/0.2	8	180 Mtr	2633	12
1.0	32/0.2	13	180 Mtr	3440	12
1.5	30/0.25	17	180 Mtr	4973	8
2.5	50/0.25	24	180 Mtr	8117	6
4.0	56/0.25	30	180 Mtr	12419	4
6.0	84/0.3	38	180 Mtr	18466	2

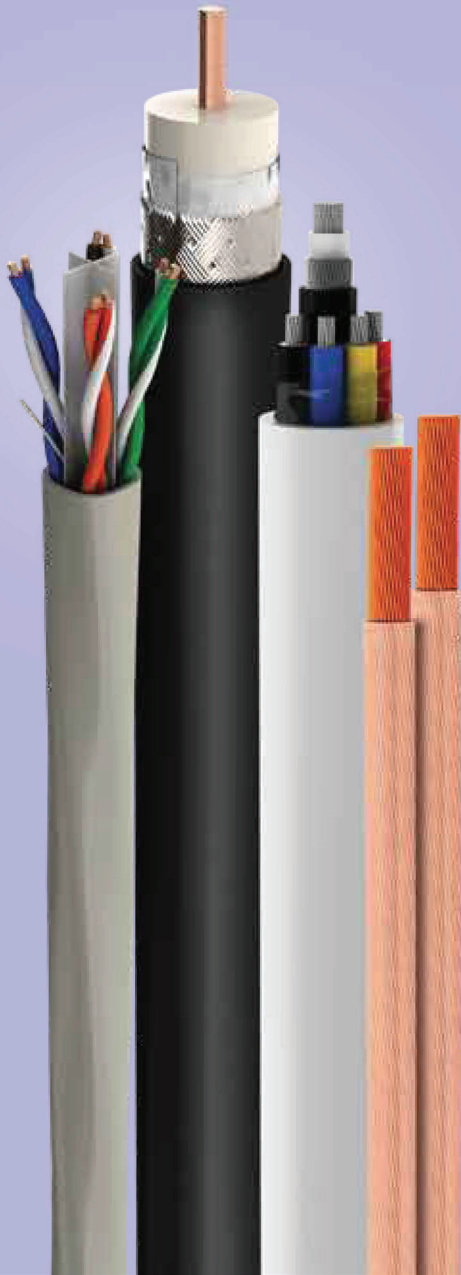

COMMUNICATION CABLES

RR KÄBEL
WIRES & CABLES

- RATNA CO-X
- RATNA LAN
- RATNA COM
- CCTV CAMERA CABLE
- SPEAKER CABLE

RATNA CO-X



RR Kabel makes Electrolytic grade solid annealed bare copper conductor gas injected physical polyethylene foam insulated, wrapped with Aluminium Mylar tape and Al alloy wire braided, Jelly flooded and PVC Jacketing in Black Colour, Co-Axial Industrial Cables. (HSN Code : 8544)

RG 59 F		RG 6 F		RG 11 F	
90 Mtr.	305 Mtr.	90 Mtr.	305 Mtr.	90 Mtr.	305 Mtr.
2006	6799	2565	8690	5713	19364

RATNA LAN



RR Kabel makes Solid bare copper conductor 4 Pair unshielded twisted pair (UTP) Industrial cables for Computer Lan Network with Grey colour & FR PVC Jacket. (HSN Code : 8544)

CAT 5e		CAT 6	
100 Mtr.	305 Mtr.	100 Mtr.	305 Mtr.
3233	9857	4323	13181

RATNA COM



RR Kabel makes Solid Electrolytic annealed bare copper conductor Industrial Switchboard & Telephone Cables with high density polyethylene insulation, paired, polyester taped, Nylon Rip Cord and Grey colour sheathed with FR PVC, generally conform to "ITD specification S/WS 113 C" (HSN Code : 8544) (Rate/90 Mtr Coil)

Dia	1 Pair	2 Pair	3 Pair	4 Pair	5 Pair	10 Pair	20 Pair
0.5 mm	920	1619	2386	3127	3897	7444	14131


CCTV CAMERA CABLES



RR Kabel makes Annealed Tinned copper conductor, PE Insulated, ATC Braided, Polyester tape screened, PVC outer sheathed Industrial CCTV Camera Cables.(HSN CODE : 8544)

Size	Packing	Rate Per Coil	No. of Coils packed in an Outer Box
3 + 1	90 Mtr.	3780	3
4 + 1	90 Mtr.	4237	3

SPEAKER CABLES



RR Kabel makes Multistrand Annealed bare copper conductor, PVC Insulated Industrial Speaker wires. (HSN CODE : 8544)

Size	Packing	Non Transparent Insulation (Rate/Coil)	Transparent Insulation (Rate/Coil)	No. of Coils packed in an Outer Box
2C x 0.50	90 Mtr.	1841	1896	10
2C x 0.75	90 Mtr.	2625	2704	10
2C x 1.0	90 Mtr.	3311	3410	8
2C x 1.5	90 Mtr.	4777	4920	8
2C x 2.5	90 Mtr.	7608	7836	8



INDUSTRIAL CABLES

RR KÄBEL
WIRES & CABLES

- FLEXIBLE SINGLE CORE CABLE
- FLEXIBLE MULTICORE CABLES
- SHIELDED CABLE
- BRAIDED CABLE

RR KABEL FR HSF / FR-LSH / LSOH-FR



 RR KABEL

RR Kabel makes single core unsheathed Multistrand High Conductivity plain annealed Copper, FR PVC/FR-LSH PVC/ Thermoplastic Halogen free Flame Retardant (HFFR) 70° Insulated Industrial Cables in voltage grade upto and including 1100 Volts (HSN Code : 8544)

RATE / 100 MTR					
Size (Sq.mm)	Configuration	AMPS	RR KABEL FR HSF FR PVC INSULATION As Per IS 694	RR KABEL FR-LSH FR-LSH PVC INSULATION As Per IS 694	RR KABEL LSOH-FR <small>Thermoplastic Halogen Free Flame Retardant (HFFR) 70° C Insulation As Per IS 17048</small>
10.0	140/0.3	52	18308	18945	20113
16.0	126/0.4	70	28978	29988	31677
25.0	196/0.4	88	46915	48793	52546
35.0	276/0.4	112	65627	68250	73499
50.0	396/0.4	146	93589	97329	104817
70.0	360/0.5	216	132632	137937	148546
95.0	480/0.5	262	178420	185555	199829
120.0	608/0.5	310	230861	240097	258566
150.0	750/0.5	355	286181	297631	320524
185.0	931/0.5	415	348052	361975	389816
240.0	1200/0.5	500	457891	476206	512838
300.0	1500/0.5	550	571634	594500	640229
400.0 *	2013/0.5	590	776770	807842	869982
500.0 *	2562/0.5	660	1006879	1047152	1127702
630.0 *	3416/0.5	725	1338435	1391972	1499048

The item marked * are non stock items, refer to marketing dept. for delivery schedule, MOQ, packing etc.

** RR Kabel LSOH-FR: Insulation conforming to HFI TP 70 as per IS 17048

RR KABEL FR HSF SINGLE CORE



 RR KABEL

Multistrand bright electrolytic annealed bare copper conductor, FR PVC Insulated Unsheathed Single core round flexible Industrial Power Cables for working voltages upto and including 1100 Volts as per IS 694 (HSN CODE : 8544)

Size (Sq.mm)	Configuration	AMPS	Rate Per 100 Mtr
0.5	16/0.2	5	1058
0.75	24/0.2	8	1485
1.0	32/0.2	13	1937
1.5	30/0.25	17	2801
2.5	50/0.25	24	4561
4.0	56/0.3	30	6975
6.0	84/0.3	38	10374

RATNA FLEX MULTICORE CABLES



RR Kabel makes Multistrand bright electrolytic annealed bare copper conductor, PVC Insulated & PVC sheathed multicore round flexible Industrial Cables for working voltages upto and including 1100 Volts, as per IS 694 (HSN CODE : 8544)

Rate per 100 meter											
Size (Sq.mm)	CONFIG.	AMPS	2 CORE	3 CORE	4 CORE	Size (Sq.mm)	CONFIG.	AMPS	2 CORE	3 CORE	4 CORE
0.5	16/0.2	5	3023	3989	5015	25.0	196/0.4	88	106800	151409	199479
0.75	24/0.2	8	3981	5363	6850	35.0	276/0.4	112	-	211436	280186
1.0	32/0.2	13	4879	6812	8723	50.0	396/0.4	146	-	301822	393057
1.5	30/0.25	17	6740	9316	12130	70.0	360/0.5	216	-	424640	559802
2.5	50/0.25	24	10670	14945	19438	95.0	480/0.5	262	-	572830	751104
4.0	56/0.3	30	16393	22995	30124	120.0	608/0.5	310	-	723170	957763
6.0	84/0.3	38	23633	33711	44358	150.0	750/0.5	355	-	917963	1204000
10.0	140/0.3	52	41558	59545	77592	185.0	931/0.5	415	-	1127983	1464767
16.0	126/0.4	70	64924	91693	120818	240.0	1200/0.5	500	-	1465973	1980979
						300.0	1500/0.5	550	-	1828637	2474425

CONTROL CABLES



RR Kabel makes Multistrand bright electrolytic annealed bare copper conductor, PVC Insulated & PVC sheathed multicore round flexible Industrial Control Cables (JZ-500), Voltages Grade 300/500 V. (HSN CODE : 8544)

Rate per 100 meter												
Size (Sq.mm)	CONFIG.	AMPS	5 CORE *	6 CORE *	7 CORE *	8 CORE *	10 CORE *	12 CORE *	14 CORE *	16 CORE *	19 CORE *	24 CORE *
0.5	16/0.2	5	6629	7775	8794	10390	12889	15065	17451	19576	23326	29568
0.75	24/0.2	8	9089	10877	12313	14766	18231	21475	24939	28448	34640	42964
1.0	32/0.2	13	11607	13809	15723	18728	23340	27699	32445	36022	44849	54660
1.5	30/0.25	17	16313	19560	22376	26242	32857	38781	45596	51358	60766	77858
2.5	50/0.25	24	26260	31838	36477	42716	53821	63381	74350	84985	101075	126882
4.0	56/0.3	30	40783	49649	57362	67552	84427	100013	116478	132753	156829	200371
6.0	84/0.3	38	60774	73542	85709	99154	126696	150177	174082	198275	233971	298525
10.0	140/0.3	52	102814	-	-	-	-	-	-	-	-	-
16.0	126/0.4	70	162011	-	-	-	-	-	-	-	-	-

Loading factor for Different Insulation / Sheath * -

FR Insulation	FR Sheath	FR-LSH / HR Insulation	FR-LSH / HR Sheath	LSOH Insulation	LSZH Sheath
5%	5%	10%	10%	35%	25%

The item marked * are non stock items, refer to marketing dept. for delivery schedule, MOQ, packing etc.

SUBMERSIBLE FLAT CABLES

RR Kabel makes 3 Core PVC Insulated and sheathed Industrial Flat cables for Submersible Motor, working voltages upto and including 1100 Volts, as per IS 694



Size (Sq.mm)	Configuration	Rate 100 mtr
1.5	22/0.3	9957
2.5	36/0.3	15524
4.0	56/0.3	22760
6.0	84/0.3	33005
10.0	140/0.3	57470
16.0	126/0.4	89129
25.0	196/0.4	139990

* For XLPE Insulated Submersible Flat Cables (Cu/XLPE/PVC), contact us for pricing and availability. MOQ will be applicable.

ONLY THE BEST SUBMERSIBLE CABLES CAN WITHSTAND THE HARSHTEST CONDITIONS.

- PVC & XLPE Insulation
- Electrolytic Grade
Annealed Copper
- Better Conductivity
- CE, REACH &
RoHS Compliant



AKALMAND BANO, SAHI CHUNO.

SHIELDED CABLES



RR Kabel makes Flexible / Stranded Bare Copper Conductor, PVC Insulated, Overall Aluminium Mylar Tape Shielded with ATC Drain Wire and Outer PVC Sheathed Industrial Instrumentation (Shielded) Cables, Voltage Grade 300/500V, as per BS EN 50288-7

SIZE	Size in Sq.mm / Rate Per 100 Meter (in INR)					MOQ (KM)
	0.50	0.75	1.00	1.50	2.50	
2 Core	5497	6701	7844	10034	14756	3
3 Core	6881	8669	10354	13361	20509	3
4 Core	8522	10922	13247	17486	26451	3
5 Core	9891	12954	15732	21077	32849	3
6 Core	11557	15212	18724	24564	-	3
7 Core	12821	17083	20915	27962	43041	3
8 Core	14532	19449	23680	32035	51090	2
9 Core	16067	-	-	-	-	2
10 Core	17817	23924	29474	40433	63361	2
12 Core	20641	27974	34946	47232	75117	2
14 Core	23503	31430	40221	54598	88039	1
16 Core	26655	36869	45457	61894	100481	1
18 Core	29598	40671	50739	69174	113384	1
20 Core	32894	45036	56283	79220	125787	1
22 Core	36042	49230	61594	-	-	1
25 Core	40426	55408	70113	-	-	1
27 Core	43316	59479	74627	-	-	1

Note : Please contact to HO for Technical Data Sheet.

SHIELDED ARMoured CABLES



RR Kabel makes Flexible / Stranded Bare Copper Conductor PVC / XLPE Insulated, Overall Aluminium Mylar Tape Shielded with ATC Drain Wire, PVC Inner Sheathed, GI Wire / Strip Armour And Outer PVC Sheathed Industrial Instrumentation (Shielded Armoured) Cables, Voltage Grade 300/500V, as per BS EN 50288-7.

SIZE	Size in Sq.mm / Rate Per 100 Meter (in INR)					MOQ (KM)
	0.50	0.75	1.00	1.50	2.50	
2 Core	10543	12228	13824	16923	22689	5
3 Core	12572	14757	17190	21001	29387	5
4 Core	14381	17230	20706	25209	37138	3
5 Core	16497	20121	24440	29875	43626	3
6 Core	18788	23252	27737	35136	-	3
7 Core	20079	24948	29691	38369	57528	3
8 Core	22857	28117	33172	43372	64543	3
9 Core	24441	-	-	-	-	3
10 Core	26253	33010	40413	53436	79401	3
12 Core	29683	37456	46111	60402	93227	3
14 Core	32913	42063	53616	69575	103940	3
16 Core	36788	49645	57921	78289	117455	3
18 Core	41469	50834	64751	86963	130678	3
20 Core	46481	56196	70945	98851	144724	2
22 Core	47519	61475	76856	-	-	2
24 Core	-	-	82564	-	-	2
25 Core	52038	67809	85139	-	-	2
27 Core	54688	71598	94479	-	-	2

Note : Please contact to HO for Technical Data Sheet.

BRAIDED CABLES



RR Kabel makes Flexible / Stranded Bare Copper Conductor, PVC Insulated, Annealed Tinned Copper Braided with Optimum coverage and Outer PVC sheathed Industrial Braided cables, Voltage Grade 300/500V.

Size in Sq.mm / Rate Per 100 Meter (in INR)						
SIZE	0.25	0.50	0.75	1.00	1.50	2.50
2 Core	7333	8280	9033	10223	12972	19367
3 Core	7890	9329	11220	12915	16937	25427
4 Core	9486	11298	13902	16350	21188	32293
5 Core	11879	13328	16644	19488	25892	40164
6 Core	13995	14719	17697	22109	29073	-
7 Core	14775	15978	20302	24400	33137	51549
8 Core	15831	18111	23293	27929	38280	-
9 Core	-	-	-	-	42825	-
10 Core	18914	22667	28881	34583	47577	-
12 Core	20958	25147	33292	40465	55416	87053
14 Core	-	28808	37993	46810	64293	-
16 Core	-	32429	42833	52688	72387	-
18 Core	29495	36137	48484	59232	81653	-

Size in Sq.mm / Rate Per 100 Meter (in INR)				
SIZE	4.0	6.0	10.0	16.0
2 Core	27413	37966	-	-
3 Core	38008	53128	-	-
4 Core	47851	67754	113184	183105

Note : Please contact HO for Technical Data Sheet.

Note : Minimum Order Quantity (MOQ)

Size - upto 0.25 x 8C - 5 KM, upto 0.25 x 8C to 18C and 0.50 to 1.50 x 7C - 3 KM,
 0.50 x 8C to 4.0 x 4C - 2 KM, 0.50 x 22C to 1.00 x 27C - 2 KM.

PAIR SHIELDED CABLES



RR Kabel makes Flexible / Stranded Bare Copper Conductor, PVC / XLPE Insulated, Twisted Pairs, Overall Aluminium Mylar Tape Shielded with ATC Drain Wire and Outer PVC Sheathed Industrial Instrumentation (Pair Shielded) Cables, Voltage Grade 300/500V, as per BS EN 50288-7.

Size in Sq.mm / Rate Per 100 Meter (in INR)							
Number of Pair	0.50	0.75	MOQ (KM)	1.00	1.50	2.50	MOQ (KM)
1	6721	8232	10	10199	11746	16905	5
2	11011	13380	5	17073	21210	31785	3
3	14251	17990	3	22682	29914	45208	3
4	16575	23137	3	29117	38053	59057	3
5	20200	28206	3	36097	46120	70639	3
6	23571	33131	3	42981	54650	83980	2
8	30260	42600	3	53991	72279	110558	2
10	37245	51751	3	66453	88476	137055	2
12	44319	61846	3	78881	105303	163499	2
14	-	-	-	-	120792	-	1
16	57562	80872	2	104508	140081	218184	1
20	71487	100826	2	129378	173850	271280	1
24	84803	119954	2	154176	207523	324302	1

RR Kabel makes Flexible / Stranded Bare Copper Conductor, PVC / XLPE Insulated, Twisted Pairs, Individual pair and Overall Aluminium Mylar Tape Shielded with ATC Drain Wire and Outer PVC Sheathed Industrial Instrumentation (Pair Shielded) Cables as per BS EN 50288-7.

Size in Sq.mm / Rate Per 100 Meter (in INR)							
Number of Pair	0.50	0.75	MOQ (KM)	1.00	1.50	2.50	MOQ (KM)
2	14288	16635	5	20375	25250	36020	2
3	18553	23078	5	28609	35289	51037	2
4	23694	28908	3	34759	45940	66802	2
5	27986	35068	3	43587	55760	81524	1
6	33254	42203	2	51102	66190	97013	1
8	44457	55069	2	67534	86996	127959	1
10	54632	67891	1	83420	107721	158818	1
12	64787	80675	1	99288	124775	189621	1
16	85534	104009	1	127081	166189	245992	1
20	105887	128961	1	159273	206615	306216	1
24	126217	153918	1	190235	247021	366421	1
25	-	-	-	197978	-	-	1

Note: The MOQ is given above, please contact HO for Technical Data Sheet.

PAIR SHIELDED ARMOURED CABLES



RR Kabel makes Flexible / Stranded Bare Copper Conductor, PVC / XLPE Insulated, Twisted Pairs, Overall Aluminium Mylar Tape Shielded with ATC Drain Wire, PVC Inner Sheathed, GI Wire/Strip Armour and Outer PVC Sheathed Industrial Instrumentation (Overall Pair Shielded Armoured) Cables, Voltage Grade 300/500V, as per BS EN 50288-7.

Size in Sq.mm / Rate Per 100 Meter (in INR)							
Number of Pair	0.50	0.75	MOQ (KM)	1.00	1.50	2.50	MOQ (KM)
1	10647	12228	10	13955	16591	22244	5
2	16346	19828	5	23205	28338	39563	3
3	19170	23488	3	28103	36582	54565	3
4	23182	29100	3	34843	47228	65543	3
5	27035	34373	3	41929	53732	79165	3
6	30790	39534	3	51142	62711	92955	2
8	40256	49346	3	60099	81403	120220	2
10	44495	58712	3	72624	98116	147234	2
12	51987	69078	3	84992	115137	174030	2
14	-	-	-	-	131418	-	1
16	65615	88146	2	110250	150527	229031	1
20	79915	108142	2	134592	185211	282255	1
24	93415	127121	2	158722	218707	335211	1

RR Kabel makes Flexible / Stranded Bare Copper Conductor, PVC / XLPE Insulated, Twisted Pairs, Individual Pair and Overall Aluminium Mylar Tape Shielded with ATC Drain Wire, PVC Inner Sheathed, GI Wire / Strip Armour and Outer PVC Sheathed Industrial Instrumentation (Individual Pair and Overall Shielded Armoured) Cables, Voltage Grade 300/500V, as per BS EN 50288-7.

Size in Sq.mm / Rate Per 100 Meter (in INR)							
Number of Pair	0.50	0.75	MOQ (KM)	1.00	1.50	2.50	MOQ (KM)
2	19635	22950	5	26366	31629	42146	2
3	24531	28366	5	33025	41418	53662	2
4	29370	35325	3	41690	52189	68760	2
5	35598	43723	3	50756	60014	84781	1
6	41353	48140	2	56585	70313	99778	1
8	49813	61350	2	73185	90677	129520	1
10	60115	74382	1	89048	110846	159027	1
12	70313	87316	1	104792	130877	188374	1
16	90913	113578	1	135560	171822	248543	1
20	111045	139172	1	168107	211688	307082	1
24	131054	164665	1	199223	251413	365446	1
25	-	-	-	206989	-	-	1

Note: The MOQ is given above, please contact HO for Technical Data Sheet.

Get in Touch with Us

Contact Us:

Mr. Laxmikant Laddha: 09822332340

Giriraj Laddha: 09881245431

Rahul Laddha: 09881245432

 sales@rajelectricals.co.in

 <https://rajelectricals.co.in/>

Lighting Store:

583, Narayan Peth, Jaldhara Society,
Near Kanyashala, Pune-411030

Phone: (020) 24455293, 24461156,
24481583, 24486306, 24492424

Electrical Store:

353/2, Shaniwar Peth, Ramanbaug
Co-operative Hsg Society, Near
Ramanbaug School, Pune-411030.

Phone: 098812 45432

 [rajelectricalspune](https://www.facebook.com/rajelectricalspune)

 [raj__electricals](https://www.instagram.com/raj__electricals)