





Lights are an important part of our lives, we all know that. But I had never really fathomed their importance with respect to changing the look of your spaces completely, until last year. 2021 marked the year of my introduction to Magik Lighting and a complete change in my outlook regarding lights. And hence, I joined hands with Magik Lighting to start this illuminating revolution in India.

Magik Lighting is the largest manufacturer of LED lights in Eastern India. They have their own production facility and an NABL-accredited lab nestled in the heart of Bengal. It is truly endearing to see a brand from our neighbourhood reach such heights.

And obviously, such a feat is not possible to achieve without top-of-the-line products that come in every shape and form in over 750+ variants. From indoor usage to outdoor lighting, home décor to office renovation, they have lighting solutions for all. And I can vouch for it, since my own office is completely revamped with quality lights from Magik.

Now, like me, you too can light up your spaces with 750+top quality solutions... Magik se.

Sourav Ganguly

Brand Ambassador of Magik Lighting


# CENTURY LED LTD.

We, at Century LED Ltd., have always strived to understand the needs of our consumers and offer solutions that are best in class, consumer-friendly and delightful. Each product in our MAGIK LED range has been carefully crafted and designed to cater all kinds of lighting needs in industrial, outdoor, retail and home segments. Our easy to fit products come in varied sizes and shapes, and last longer than ordinary LEDs.

MAGIK has stayed true to its name when it comes to lighting. With meticulous design process and state-of-the-art manufacturing technologies, it never fails to transform your ambience and LIFTS YOUR SPACES and mood. Every corner of your room, every part of your living feels new and refreshing under the shine of MAGIK. And we aren't satisfied and settled with this much. We hope to surprise our consumers even more with newer products. We are relentlessly redefining our technology and keep rediscovering our potential to make your every day and night delightful.





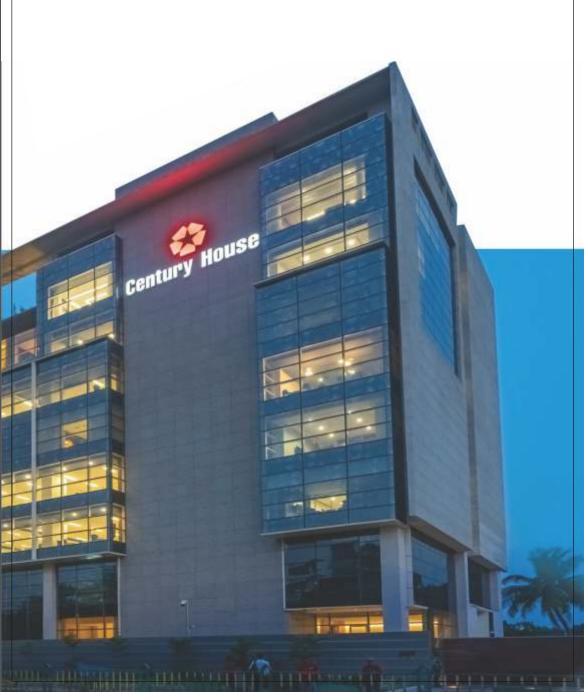

# MAGIKAL MECHANISM

We are proud to design our every product at our own design lab in Kolkata, where every parameter is planned and monitored minutely. Our R&D engineers take extra care while selecting the LEDs. They never compromise on luminosity and colour accuracy. The lights are then assembled inside specially designed casings which help in proper heat dissipation. The electronic driver is designed to withstand the harsh electrical voltage variations of Indian climate. Finally, each product is tested by our in-house Goneophotometer to ensure proper light output, making it truly worthy of your beautiful home.

Magik products use LEDs from only selected LED bins to deliver high-efficiency products, as LED components vary from each other in terms of colour rendition, forward voltage and flux, even within the same production batch. Installed in an enormous dark room, our MIRROR GONEO PHOTO METER tests and records data on the luminous intensity distribution curve, effective angle and beam angle, total luminous flux, light efficiency, utilization factor, current, voltage, power and power factor amongst other parameters. This data helps us provide you with the optimum lighting solutions.











Each product in the MAGIK LED range has been carefully crafted and designed to cater to all kinds of lighting needs in industrial, outdoor, retail and home segments. Our easy to fit products come in varied sizes and shapes, and last longer than ordinary LEDs.

# ABOUT OUR RANGE

# **CERTIFICATIONS**

#### MES APPROVAL



#### PWD APPROVAL - WEST BENGAL



#### PWD APPROVAL - ASSAM



#### RAILWAY APPROVAL






#### PHE APPROVAL



#### **R&B APPROVAL**

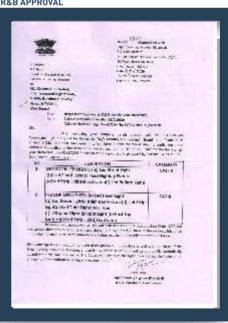

#### ISO CERTIFICATE



#### **NABL CERTIFICATE**





National Accreditation Board for Testing and Calibration Laboratories

PARTIE.

#### CERTIFICATE OF ACCREDITATION

#### PHOTOMETRY LABORATORY, CENTURY LED LIMITED

has been assessed and accredited in accordance with the standard

#### ISO/IEC 17025:2017

"General Requirements for the Competence of Testing & Calibration Laboratories"

for its facilities at

SRIJAN INDUSTRIAL LOGISTIC PARK, BLOCK-A, IST FLOOR, WH 11,12,15,16, NH-6, BOMBAY ROAD, ANKURHATI, DOMJUR, HOWRAH, WEST BENGAL, INDIA

in the field of

#### **TESTING**

Certificate Number: TC-6955

Issue Date:

05/03/2022

Valid Until:

04/03/2024

This certificate remains valid for the Scope of Accreditation as specified in the annexure subject to continued satisfactory compliance to the above standard & the relevant requirements of NABL. (To see the scope of accreditation of this laboratory, you may also visit NABL webties www.mabladin.org)


Name of Legal Identity: Century LED Limited


Signed for and on behalf of NABL



herentym


N. Venkateswaran Chief Executive Officer

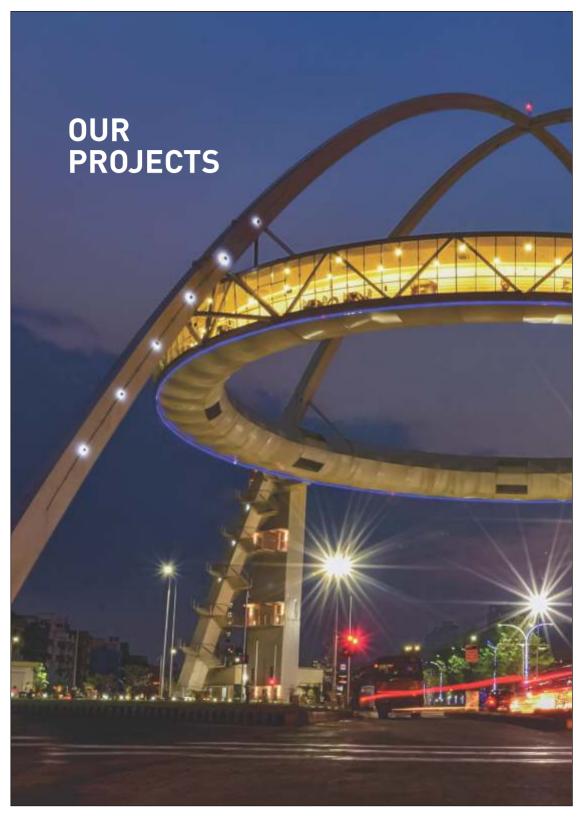


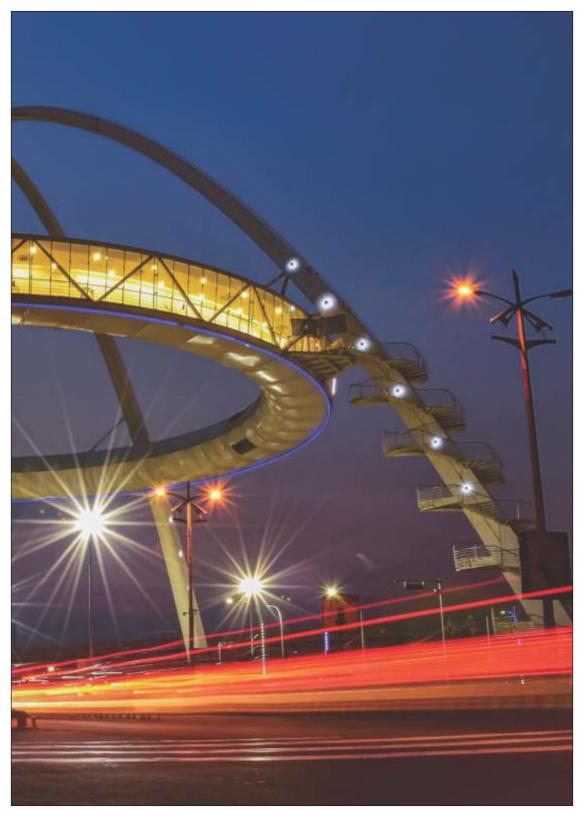






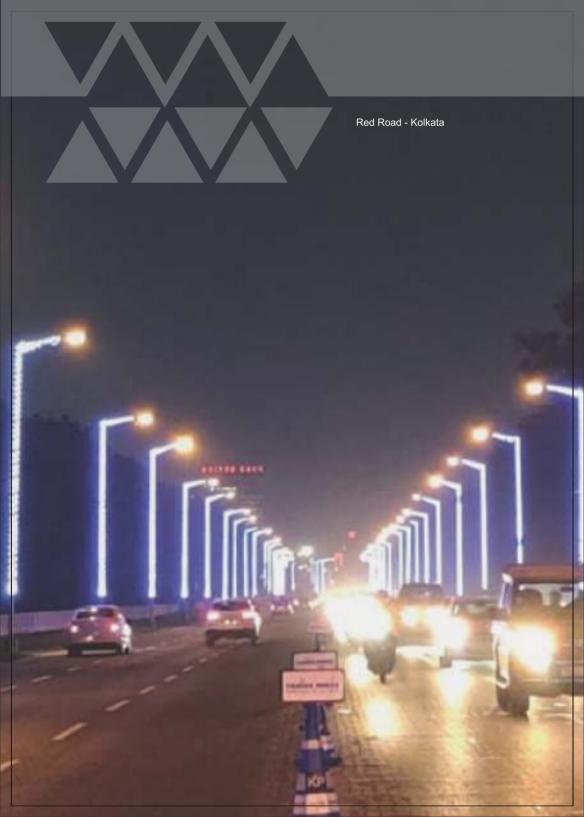


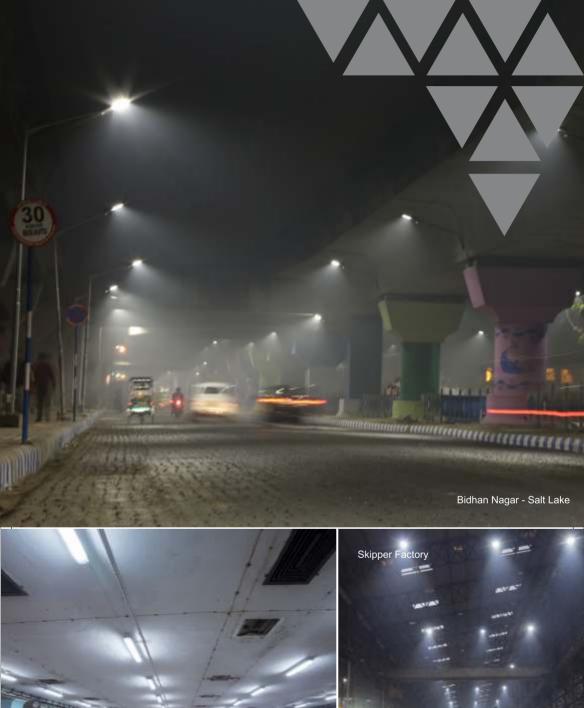



# OUR CLIENTS

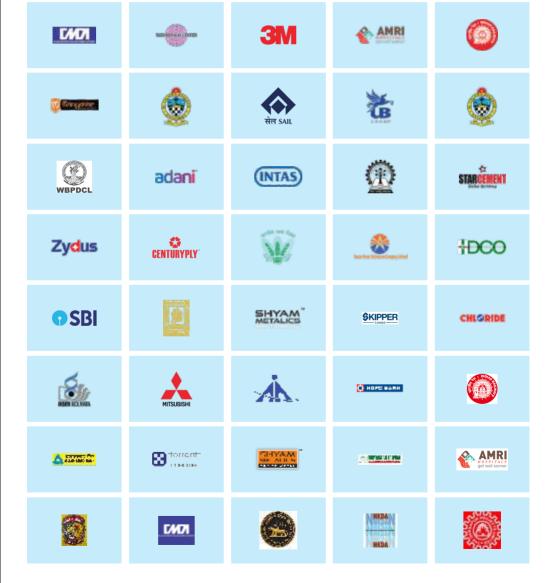

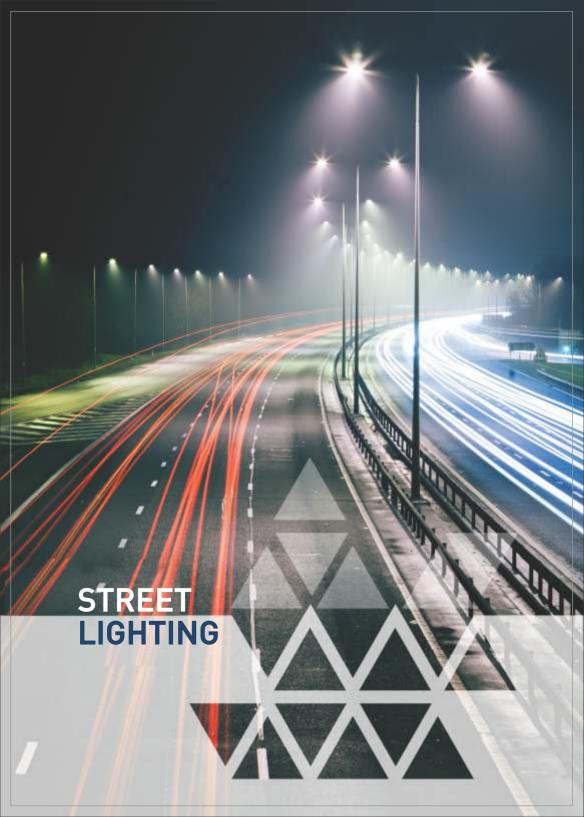

#### LIGHT

# **Solis Plus Street Light**

- Pressure die cast aluminum housing for rugged applications.
- Long life and consistent performance in wet & dusty areas of application.
- No light pollution.
- High power led with secondary optics & toughened glass



	В	ALL DIMENSIONS IN MM					
		WATTAGE	Α	В	С		
	11	20	347	118	40		
A	1	25	347	118	40		
		30	347	118	40		
	1	36	347	118	40		
	= C	45	363	138	40		

#### PRODUCT FEATURES



System Efficacy >110lm/w



AC 120 -300 V ,50 Hz.



50,000 hr



CRI 70 +



IP 66

#### **APPLICATIONS**



SERVICE ROAD



RURAL ROAD



**INDUSTRIES** 

CAT REF. No.	WATTAGE	ССТ	MRP(₹)
SPSP020C	20	5700	2200
SPSP020W	20	3000	2200
SPSP025C	25	5700	2500
SPSP025W	25	3000	2500
SPSP030C	30	5700	3050
SPSP030W	30	3000	3050
SPSP036C	36	5700	5093
SPSP036W	36	3000	5093
SPSP045C	45	5700	5626
SPSP045W	45	3000	5626

# **Solis Plus Street Light**

- Pressure die cast aluminum housing for rugged applications.
- Long life and consistent performance in wet & dusty areas of application.
- No light pollution.
- High power led with secondary optics & toughened glass



#### PRODUCT FEATURES:

System Efficacy >110lm/w



AC 120 -300 V ,50 Hz.



50,000 hr



CRI 70 +



IP 66





CITY ROAD LIGHTING



HERITAGE AREA



OUTDOOR LIGHTING



AREA LIGHTING



В	ALL DIMENSIONS IN MM					
B	WATTAGE	Α	В	С		
	60	363	138	61		
	72	363	138	61		
Α	90	435	228	61		
January.	120	435	228	61		
G	150	515	260	66		
- 0	180	515	260	66		
€C	200	515	260	66		

CAT REF. No.	WATTAGE	сст	MRP(₹)				
SPSL060C	60	5700	6305				HDD(I)
SPSL060W	60	3000	6305	CAT REF. No.	WATTAGE	ССТ	MRP(₹)
SPSL072C	72	5700	7275	SPSL150C	150	5700	15055
SPSL072W	72	3000	7275	SPSL150W	150	3000	15055
SPSL090C	90	5700	9215	SPSL180C	180	5700	18818
SPSL090W	90	3000	9215	SPSL180W	180	3000	18818
SPSL120C	120	5700	14065	SPSL200C	200	5700	23053
SPSL120W	120	3000	14065	SPSL200W	200	3000	23053



# **Solis Neo Street Light**

- Pressure die cast aluminum housing for rugged applications.
- Long life and consistent performance in wet & dusty areas of application.
- No light pollution.
- High power led with IP lens



В	ALL DIMENSIONS IN MM					
	WATTAGE	Α	В	С		
	25	245	75	39		
A	30	245	75	39		
	36	245	75	39		
⊕C	45	245	75	39		





AC 120 -300 V ,50 Hz.




50,000 hr



CRI 70 +



IP 66





HERITAGE AREA



**OUTDOOR LIGHTING** 



AREA LIGHTING

CAT REF. No.	WATTAGE	сст	MRP(₹)
SPSN025C	25	5700	2250
SPSN030C	30	5700	2700
SPSN035C	36	5700	4500
SPSN045C	45	5700	4860

#### LIGHT

# **Blaze Street Light**

- Pressure diecast aluminium alloy housing for better thermal management
- Separate optical and control gear compartment along with top opening facilities for easy maintenance
- High efficiency drivers makes it a wise choice for street lighting applications
- The special fins created at the back of the product ensure Optimal Thermal Management
- Impact resistant polycarbonate optical lens having IP 66 protection

# PRODUCT FEATURES System Efficacy > 120lm/w



AC 120 -300 V ,50 Hz.



Lifetime 50,000 hr @ L70



CRI 70 +



IP 66

**APPLICATIONS** 



AREA LIGHTING



HIGHWAY



**INDUSTRIES** 



	ALL DIMENSIONS IN MM					
	WATTAGE	Α	В	С		
Α	46	315	96	46		
	60	315	96	46		
	75	302	153	60		
B   E	90	366	196	60		
	100	366	196	60		
-TI	120	366	196	60		
C. MILITAR	140	479	209	60		
	155	479	209	60		
	185	479	209	65		
	200	479	209	65		

CAT REF. No.	WATTAGE	сст	MRP(₹)	CAT REF. No.	WATTAGE	сст	MRP(₹)
SPBL046C	46	5700	6134	SPBL120C	120	5700	16000
SPBL046W	46	3000	6134	SPBL120W	120	3000	16000
SPBL060C	60	5700	8000	SPBL140C	140	5700	18667
SPBL060W	60	3000	8000	SPBL140W	140	3000	18667
SPBL075C	75	5700	9600	SPBL155C	155	5700	20667
SPBL075W	75	3000	9600	SPBL155W	155	3000	20667
SPBL090C	90	5700	12000	SPBL185C	185	5700	24667
SPBL090W	90	3000	12000	SPBL185W	185	3000	24667
SPBL100C	100	5700	13333	SPBL200C	200	5700	26666
SPBL100W	100	3000	13333	SPBL200W	200	3000	26666

Available With Nima Socket Available with dimmable option & smart application also

# **Orion Street Light**


- Pressure diecast aluminium alloy housing for better thermal management
- Separate optical and control gear compartment along with top opening facilities for easy maintenance
- Photometric engine with light distributions adapted to various applications
- Low glare control for visual comfort and eye safety for passers-by
- Optimized batwing light distribution to accommodate different type of roads (different sized roads)
- High power led with secondary optics & toughened glass



	ALL DIMENSIONS IN MM					
	WATTAGE	Α	В	С		
	60	365	185	50		
	72	365	185	50		
_ A	90	475	235	55		
	120	475	235	55		
100	150	550	265	65		
	180	550	265	65		
	200	550	265	65		
	220	550	265	65		
	240	550	265	65		

#### PRODUCT FEATURES:











#### APPLICATIONS:









CAT REF. No.	WATTAGE	сст	MRP(₹)	CAT REF. No.	WATTAGE	сст	MRP(₹)
SPOR060C	60	5700	8400	SPOR150W	150	3000	21701
SPOR060W	60	3000	8400	SPOR180C	180	5700	25200
SPOR072C	72	5700	10080	SPOR180W	180	3000	25200
SPOR072W	72	3000	10080	SPOR200C	200	5700	28000
SPOR090C	90	5700	12600	SPOR200W	200	3000	28000
SPOR090W	90	3000	12600	SPOR220C	220	5700	29400
SPOR120C	120	5700	16800	SPOR220W	220	3000	29400
SPOR120W	120	3000	16800	SPOR240C	240	5700	32000
SPOR150C	150	5700	21701	SPOR240W	240	3000	32000



#### LIGHT

# **Optimus Street Light**

- Pressure diecast aluminium alloy housing for better thermal management
- Tested for 440v for 48 hour phase to phase
- Optimized batwing light distribution to accommodate different type of roads
- Impact resistant polycarbonate optical cover.
- Complies to various international norms of safety & performance.
- Inbuilt tilting arrangement
- Specially designed fins in between optical block along with the side of the luminaire to ensure better thermal management

#### PRODUCT FEATURES



System Efficacy
Upto 140lm/w



AC 120 -300 V, 50 Hz.



Lifetime 50,000 hr @ L70



CRI 70+



IP 66





HIGHWAY



**INDUSTRIES** 



Δ	ALL DIMENSIONS IN MM					
A	WATTAGE	Α	В	С		
C B	180	645	330	70		
	210	645	330	70		
	250	645	330	70		

CAT REF. No.	WATTAGE	сст	MRP(₹)
SPOP180C	180	5700	26500
SPOP180W	180	3000	26500
SPOP210C	210	5700	31525
SPOP210W	210	3000	31525
SPOP250C	250	5700	36860
SPOP250W	250	3000	36860





SOLAR STREET LIGHTING

#### LIGHT


# **Daystar Solar Street Light**

- Efficient Mono crystalline solar PV Module with faster charging facility.
- Extruded aluminium housing along with powder coated grey finish.
- PIR Motion sensor, Automatic dimming facility can also be provided on request.
- Longer life with Type-II medium photometric distribution to achieve Uniform light in road surface.
- Battery is of (LiFeP04) Lithium Ferro Phosphate for longer life.
- Solar Charge Controller is MPPT Type to increase the efficiency of luminaire.



# System Efficacy Upto 140Im/W Lifetime 50,000 hr @ L70 CRI 70+ IP 66 APPLICATIONS City Road Pathways Pathways Landscape areas

CAT REF. No.	WATTAGE	сст	MRP(₹)
SSPMDS009C	9	5700	46000
SSPMDS012C	12	5700	50149
SSPMDS015C	15	5700	55775
SSPMDS020C	20	5700	62468
SSPMDS025C5	25	5700	69161
SSPMDS030C5	30	5700	78085
SSPMDS040C5	40	5700	97000

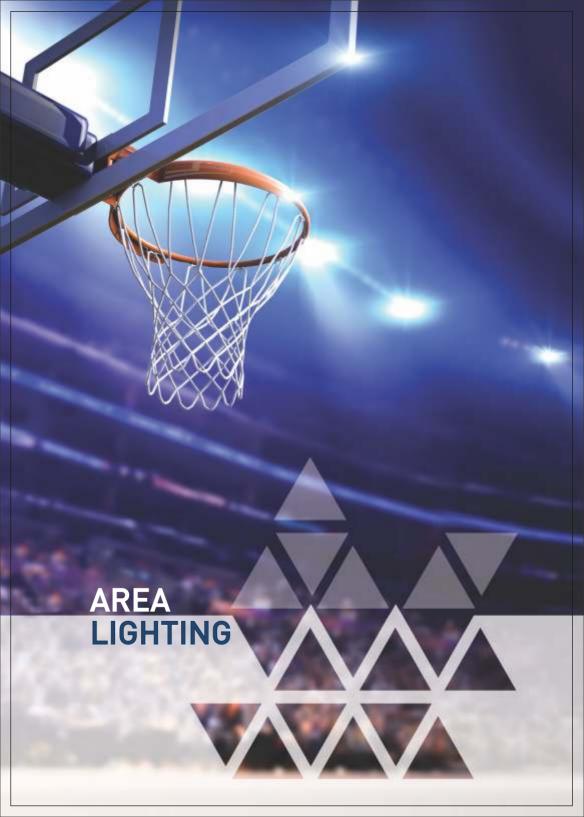

#### LIGHTING

# **Pinnacle Flood Light**

- Pressure diecast aluminium alloy housing for efficient thermal management
- Compact housing optimised for reduced dust accumulation
- Rugged design, and integrated cooling fins, to ensure optimum heat dissipation.
- Luminaire is provided with a fixed mounting bracket
- Additional surge protection provided for safety.

#### **PRODUCT FEATURES**



System Efficacy >110lm/w



AC 120 -300 V, 50 Hz.



Lifetime 50,000 hr @ L70



CRI 70 +



IP 66

#### **APPLICATIONS**



**FACADE LIGHTING** 



AREA LIGHTING



**TOWNSHIP** 



	ALL DIMENSIONS IN MM			
	WATTAGE	Α	В	С
	10	200	120	30
	30	209	140	30
c	50	279	200	35
	100	325	230	35

CAT REF. No.	WATTAGE	сст	MRP(₹)
FWPI010C	10	5700	995
FWPI010W	10	3000	995
FWPI030C	30	5700	2275
FWPI030W	30	3000	2275
FWPI050C	50	5700	3200
FWPI050W	50	3000	3200
FWPI100C	100	5700	6500
FWPI100W	100	3000	6500

### **Zenith Plus Flood Light**

- Pressure diecast aluminium alloy housing for efficient thermal management
- High quality optical lens and robust design makes it an indispensable lighting tool for highlighting task.
- This fixture offers the necessary optical freedom and flexibility to meet the needs of a wide variety of lighting applications.
- It is a direct replacement of traditional HID fixtures.
- Breathing port for better IP protection
- Available in different beam angle.



	ALL DIMENSIONS IN MM				
	WATTAGE	Α	В	С	
	50	245	220	210	
C A B	80	335	305	283	
	100	335	305	283	
	120	335	305	383	
	135	380	340	326	
	150	380	340	326	
	200	440	416	375	
	250	440	416	375	





System Efficacy >110lm/w



AC 120 -300 V, 50 Hz.



Lifetime 50,000 hr @ L70



CRI 70 +



IP 66

**APPLICATIONS** 



**FACADE LIGHTING** 



AREA LIGHTING



WAREHOUSE



**TOWNSHIP** 

CAT REF. No.	WATTAGE	сст	MRP(₹)	CAT REF. No.	WATTAGE	сст	MRP(₹)
FWZP050C	50	5700	4800	FW ZP135C	135	5700	14200
FWZP050W	50	3000	4900	FWZP135W	135	3000	14400
FWZP080C	80	5700	10100	FWZP150C	150	5700	15300
FWZP080W	80	3000	10200	FWZP150W	150	3000	15500
FWZP100C	100	5700	11000	FWZP200C	200	5700	20500
FWZP100W	100	3000	11200	FWZP200W	200	3000	21000
FWZP120C	120	5700	13500	FWZP250C	250	5700	27000
FWZP120W	120	3000	13700	FWZP250W	250	3000	28200



#### LIGHTING

## **Astral Flood Light**

- Pressure diecast aluminium alloy housing for efficient thermal management
- Designed for long-lasting performance
- Fast ROI due to long life-time and reduced maintenance
- Numerous vents on the heat sink improves heat management and ensures the stability of the light system.
- Breathing port (pressure equalizer valve) for better IP protection

#### PRODUCT FEATURES



System Efficacy > 120lm/w



AC 120 -300 V, 50 Hz.



Lifetime 50,000 hr @ L70



CRI 70 +



IP 66





FACADE LIGHTING



AREA LIGHTING



**HIGH MAST** 



WAREHOUSE



**TOWNSHIP** 



**SPORTS LIGHTING** 



_	ALL DIMENSIONS IN MM			
В	WATTAGE	Α	В	С
	300	390	350	235
1	350	390	350	235
C	400	390	350	235
, emmana	500	600	405	262

CAT REF. No.	WATTAGE	сст	MRP(₹)
FWAS300C	300	5700	34500
FWAS300W	300	3000	35000
FWAS350C	350	5700	37000
FWAS350W	350	3000	38000
FWAS400C	400	5700	45000
FWAS400W	400	3000	46000
FWAS500C	500	5700	54000
FWAS500W	500	3000	55000

\*Symmetrical / Asymmetrical beamangle \*Available in different beam angle.



# **Vulcan Pro Highbay**

- Pressure diecast aluminium housing for heat dissipation and less dust accumulation
- Protected against corrosion and vibrations. Also luminaire is impact resistant
- Lens technology ensures high performance photometry, soft light, no glare, will not cause
  eye fatique of workers
- Breathing port (pressure equalizer valve) for better IP protection

#### PRODUCT FEATURES



System Efficacy >120lm/w



AC 120 -300 V, 50 Hz.



50,000 hr



CRI 70 +



#### **APPLICATIONS**



WARE HOUSE



MILLS



**INDUSTRIES** 



В	ALL	DIMENSIO	NS IN MN	
A c	WATTAGE	Α	В	С
STIES I	90	302	128	45
E H	120	302	128	45
	150	302	128	45
	200	330	128	45
4	240	330	128	45

CAT REF. No.	WATTAGE	сст	MRP(₹)
HCVP090C	90	5700	15035
HCVP120C	120	5700	17945
HCVP150C	150	5700	20370
HCVP200C	200	5700	27160
HCVU240C	240	5700	30070

\*Also Available in 3000K & 4000K

PF: >0.95 | SURGE PROTECTION: >5KV (Internal), 10KV (External) | THD: <10% | IMPACT RESISTANCE (IK RATING): 07



- Pressure diecast aluminium housing for heat dissipation and less dust accumulation
- Protected against corrosion and vibrations. Also luminaire is impact resistant
- Lens technology ensures high performance photometry, soft light, no glare, will not cause
  eye fatique of workers.
- Breathing port (pressure equalizer valve) for better IP protection



	В	ALL	DIMENSIO	NS IN MN	1
A	-c-	WATTAGE	А	В	С
	5	120	302	128	45
		150	302	128	45
	41				

#### PRODUCT FEATURES



System Efficacy > 140lm/w



AC 120 -300 V, 50 Hz.



50,000 hr



CRI 70 +



IP 66

#### **APPLICATIONS**



WARE HOUSE



MILLS



**INDUSTRIES** 

CAT REF. No.	WATTAGE	сст	MRP(₹)
HCVP120C	120	5700	19400
HCVP150C	150	5700	21340

\*Also Available in 3000K & 4000K

 $PF: > 0.95 \quad | \quad SURGE \ PROTECTION: > 5KV \ (Internal), \ 10KV \ (External) \quad | \quad THD: < 10\% \quad | \quad IMPACT \ RESISTANCE \ (IK \ RATING): \ 07KV \ (INTERNAL \ RATING) = 1000 \ | \quad IMPACT \ RESISTANCE \ (IK \ RATING): \ 07KV \ (INTERNAL \ RATING) = 1000 \ | \quad IMPACT \ RESISTANCE \ (IK \ RATING): \ 07KV \ (INTERNAL \ RATING): \ 07KV \$ 



# **Zenith Plus Highbay**

- Pressure diecast aluminium housing for heat dissipation and less dust accumulation
- High quality optical lens and robust design makes it an indispensable lighting tool for highlighting task.
- This fixture offers the necessary optical freedom and flexibility to meet the needs of a wide variety
  of lighting applications.
- High efficiency driver makes it a wise choice for industrial applications.
- It is a direct replacement of traditional HID fixtures.
- Breathing port (pressure equalizer valve) for better IP protection
- Available in different beam angle.

#### **PRODUCT FEATURES**



System Efficacy > 110lm/w



AC 120 -300 V, 50 Hz.



Lifetime 50,000 hr @ L70



CRI 70 +



IP 66

**APPLICATIONS** 



FACADE LIGHTING



AREA LIGHTING




WAREHOUSE



**TOWNSHIP** 



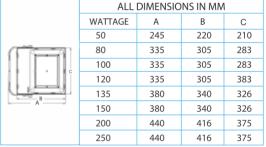

CAT REF. No.	WATTAGE	сст	MRP(₹)	CAT REF. No.	WATTAGE	сст	MRP(₹)
FWZP050C	50	5700	4800	FW ZP135C	135	5700	14200
FWZP050W	50	3000	4900	FWZP135W	135	3000	14300
FWZP080C	80	5700	10100	FWZP150C	150	5700	15300
FWZP080W	80	3000	10200	FWZP150W	150	3000	15500
FWZP100C	100	5700	11000	FWZP200C	200	5700	20500
FWZP100W	100	3000	11200	FWZP200W	200	3000	21000
FWZP120C	120	5700	13500	FWZP250C	250	5700	24000
FWZP120W	120	3000	13700	FWZP250W	250	3000	24200

PF: >0.95 | SURGE PROTECTION: >5KV (Internal), 10KV (External) | THD: <10% | IMPACT RESISTANCE (IK RATING): 07



- Pressure die cast aluminum housing for rugged applications.
- Impact resistant polycarbonate optical dome cover eliminates the common problem of glass breakage at installation site.
- Efficient electronics aid its excellent performance.



***	ALL	DIMENSIO	NS IN MN	ı
	WATTAGE	Α	В	
( 4 )	30	200	150	ľ
В	35	200	150	l
	40	200	150	I
MXV/2/2ZM	65	210	160	
c	70	210	160	l
100	75	210	160	
	100	210	160	ľ



#### **PRODUCT FEATURES:**

System Efficacy >110lm/w



AC 120 -300 v, 50 hz



50,000 hr



CRI 70+



IP 66

#### APPLICATIONS:



WARE HOUSE



STEEL PLANTS



POWER PLANT



CEMENT PLANT

CAT REF. No.	WATTAGE	ССТ	MRP(₹)
Optica	il cover - clear op	tical dome cover	
WCZS030C	30	5700	3686
WCZS030W	30	3000	3686
WCZS035C	35	5700	3880
WCZS035W	35	3000	3880
WCZS040C	40	5700	4074
WCZS040W	40	3000	4074
WCZS065C	65	5700	7566
WCZS065W	65	3000	7566

WATTAGE	ССТ	MRP(₹)
l cover - clear op	tical dome cover	
70	5700	7954
70	3000	7954
80	5700	9506
80	3000	9506
100	5700	11640
100	3000	11640
	70 70 70 80 80 100	

\*Also available in frosted optical dome cover (Price on request)

\*\*Also available in 4000K (Price on request)

PF: >0.95 | SURGE PROTECTION: >5KV (Internal), 10KV (External) | THD: <10% | IMPACT RESISTANCE (IK RATING): 07

C 150

150 150

155 155

155 155



# **Canopus Canopy Light**

- Aluminium pressure die cast housing available with weather proof gasket
- Offers the necessary optical freedom and flexibility to meet the needs of a wide variety
  of Fuel Pump applications
- More than 50% energy savings compared to HPSV/MHL luminaires
- Recess or truss mounting
- Pressure equalizer valve available

#### PRODUCT FEATURES:



System Efficacy >110lm/w



AC 120 -300 v, 50 hz



50,000 hr



CRI 70 +



IP 66

**APPLICATIONS:** 



CANOPIES



PETROL PUMP



	ALL DIMENSIONS IN MM				
	WATTAGE	Α	В	С	D
لطيا	80	340	310	260	53
A D	120	380	345	300	53

CAT REF. No.	WATTAGE	ССТ	MRP(₹)			
	Optical Cover Type - Clear					
CCCP080C	80	5700	10185			
CCCP080W	80	3000	10185			
CCCP120C	120	5700	12125			
CCCP120W	120	3000	12125			

<sup>\*</sup>Also available in frosted

<sup>\*\*</sup>Also available in 4000K

<sup>\*</sup>Mounting attachments also available on request

# **Arena Bulkhead**

- Elegantly designed engineering plastic housing with polycarbonate diffuser
- Ideal designed for rough industry environment
- High Ingress protection against dust & moisture



	ALL DIM	IENSIONS IN	IMM
B B	WATTAGE	А	В
— А —	8	162	96
	12	213	105

#### PRODUCT FEATURES:



System Efficacy >100lm/w



AC 120 -300 v, 50 hz



25,000 hr



CRI 70 +



IP 65

#### APPLICATIONS:



INDUSTRIAL



AREA LIGHTING



MANUFACTURING UNITS

CAT REF. No.	WATTAGE	сст	MRP(₹)
HWAM008C	8	6500	950
W800MAWH	8	3000	1050
HWAR012C	12	6500	1350
HWAR012W	12	3000	1400



# **Elite Prime Capsule**

- Housing made up of corrosion resistant unbreakable polycarbonate body
- Made from impact-resistant and UV-stabilised polycarbonate is highly durable, completely leak-proof
- OPAL diffuser for glare free and Uniform distribution
- MCPCB based LED for better heat dissipation and lumen maintenance



	ALL DIM	IENSIONS IN	IMM
A	WATTAGE	Α	В
;B	20	1180	85
	40	1180	85

#### **PRODUCT FEATURES:**



System Efficacy >110lm/w



AC 120 -300 v, 50 hz



Lifetime 50,000 hr @ L70



CRI 80+



IP 65

#### APPLICATIONS:



PARKING AREAS



UNDERPASS AND SUBWAYS



**WAREHOUSE & COLD STORAGES** 

CAT REF. No.	WATTAGE	MRP(₹)
XCEL020C	20	4268
XCEL040C	40	4656

\*Available in 4000K & 3000K also

# **Elite Neo Capsule**

- Housing made up of corrosion resistant unbreakable polycarbonate body
- Made from impact-resistant and UV-stabilised polycarbonate is highly durable, completely leakproof
- "Clear" version with transparent casing, guarantees high-quality appearance

#### PRODUCT FEATURES:



System Efficacy > 100lm/w



AC 120 -300 v, 50 hz



Lifetime 50,000 hr @ L70



CRI 80+



IP 65





PRODUCTION AREAS



WAREHOUSE



PARKING AREA



	ALL DIMENSIONS IN MM		
A	WATTAGE	А	В
[B	1x18	1180	85
	2x18	1180	85
	1x20	1180	85
	2x20	1180	85

CAT REF. No.	WATTAGE	MRP(₹)
BCEN118C	1X18	1940
BCEN218C	2X18	2037
BCEN120C	1X20	2134
BCEN220C	2X20	2231

<sup>\*</sup>Available in 4000K & 3000K also



# Coffer Tube holder T8 & T5

- Sleek design with CRCA steel sheet
- Finish epoxy powder coated suitable for 1X18 and 2X18W led T-8 and T-5
- Suitable for surface & suspension mounting



M.F.		
1		
1		

#### WARE HOUSE

**APPLICATIONS:** 





MANUFACTURING UNITS

	ALL DIMENSIONS IN MM			
<u> </u>	WATTAGE	Α	В	С
	1X18	1180	60	37
,	2X18	1180	60	72
	1X20	1235	68	38
	2X20	1235	70	102

CAT REF. No.	SUITABLE FOR	MRP(₹)
KCCF020	1X T-8	388
KCCF040	2X T-8	582
KCCF018	1X T-5	437
KCCF036	2X T-5	631

# **Prism Pro T8 LED Tube**

- Prism Pro T8 led tube is designed for a direct replacement of the existing T8 fluorescent lighting systems
- The tube emits an incredible 110 lm/W of 80+CRI light.
- This series is available with frosted diffuser.
- This tube is fitted with an internal Magik driver
- High efficacy poly carbonate diffuser with aluminium heat sink for efficient heat dissipation





	ALL DIMENSIONS IN MM		
BE(S	WATTAGE	Α	В
A	18	1213	28
	20	1213	28

CAT REF. No.	WATTAGE	ССТ	MRP(₹)
	Double Er	ded	
TWPP018C	18	6500	776
TWPP018W	18	3000	776
TWPP020C	20	6500	825
TWPP020W	20	3000	825
	Single En	ded	
TWPP018C	18	6500	776
TWPP018W	18	3000	776
TWPP020C	20	6500	825
TWPP020W	20	3000	825



## **Prism PC Tube**

- Prism PCT8 led tube is designed for a direct replacement of the existing T8 Fluorescent lighting Systems.
- The tube emits an incredible wide beam angle and high CRI light for better and uniform distribution.
- This tube is light in weight and made PC for easy handling
- This series is available with non yellowing frosted diffuser.
- This tube is fitted with an internal Magik driver



	ALL DIME	NSIONS IN	1 MM
	WATTAGE	Α	В
BTC	10	600	25
A	18	1220	25
	20	1220	25
	20	1215	28





System Efficacy >110lm/w



AC 120 -300 v, 50 hz



50,000 hr



CRI 80 +



IP 20

APPLICATIONS:



OFFICE



PARKING AREA



PRODUCTION AREA

CAT REF. No.	WATTAGE	сст	MRP(₹)
	Single En	ded	
TWPP010C	10	6500	270
TWPP018C	18	6500	475
TWPP018W	18	3000	475
TWPP020C	20	6500	523
TWPP020W	20	3000	523
	Double Er	nded	
TWPP018C	18	6500	475
TWPP018W	18	3000	475
TWPP020C	20	6500	523
TWPP020W	20	3000	523

<sup>\*\*</sup> This tubes comes with both single end and double end connections

# **Prism Pro T5 LED Tube**

- Prism Pro T5 led tube is designed for direct replacement of existing T5 fluorescent lighting systems.
- These tubes are ideal solution for customers who have high light output requirements and want to maximize value over lifetime.
- Full energy savings & longer lifetime results in attractive payback times and TCO (Total Cost to Operate) benefits.
- Comes with an external driver
- High efficacy poly carbonate diffuser with aluminium heat sink for efficient heat dissipation

#### PRODUCT FEATURES:



System Efficacy >110lm/w



AC 120 -300 v, 50 hz



25,000 hr



CRI 80 +



IP 20

APPLICATIONS:



OFFICE



PARKING AREA



PRODUCTION AREA



	ALL DIMENSIONS IN MM		
BEC	WATTAGE	Α	В
— А —	18	1213	28

CAT REF. No.	WATTAGE	сст	MRP(₹)
TWPP018C	18	6500	760
TWPP018W	18	3000	760



# **Prism Plus LED Batten**

- Prism Plus led batten is direct replacement of existing fluorescent lighting systems.
- Magik batten is offered in a variety of color temperatures for flexibility in all types of applications.
- Designed for higher efficacy and more brightness
- It creates uniform visual appearance resulting in huge saving over conventional fixture
- High efficacy polycarbonate diffuser with aluminium body for efficient heat dissipation



# PRODUCT FEATURES: System Efficacy > 110lm/w




















	ALL DIMENSIONS IN MM			
]B	WATTAGE	Α	В	
	10	300	30	
	20	600	30	
	40	1200	30	

CAT REF. No.	WATTAGE	сст	MRP(₹)
BWPP010C	10	6500	523
BWPP010W	10	3000	523
BWPP020C	20	6500	760
BWPP020W	20	3000	760
BWPP040C	40	6500	1140
BWPP040W	40	3000	1140

PF: >0.95 | SURGE PROTECTION: >4KV | THD: <10%

# **Linear LED Lamp**

- Designed to retrofit existing fluorescent fixtures
- High quality of light, no flickering
- Easy installation with color temperature options
- High efficacy poly carbonate diffuser with aluminium heat sink for efficient heat dissipation

#### PRODUCT FEATURES:



System Efficacy >110lm/w



AC 120 -300 v, 50 hz



25,000 hr



CRI 80 +



IP 20





OFFICE



RETAIL



INDUSTRIAL AREA



MANUFACTURING UNITS



	ALL DIMENSIONS IN MM		
В	WATTAGE	Α	В
A	18	418	43

CAT REF. No.	WATTAGE	сст	MRP(₹)
LULN018C	18	6500	650
LULN018N	18	4000	650
LULN018W	18	3000	670



# **Clean Room**

- Recess mount bottom opening luminaire
- Body fabricated from CRCA sheet
- Epoxy powder coated finish, which helps against corrosion resistance for long life in challenging environments
- VHB gasket for proper and long life bonding (nonhydroscopic and antifungal gasket)



901 E	ы	ALL DIME	NSIONS IN	I MM	
	В	WATTAGE	Α	В	С
<b>→</b>	LĬ [	45	593	593	84
	-	80	593	503	8/1

# System Efficacy > 110lm/w AC 120 -300 v, 50 hz 50,000 hr CRI 70 + IP 65 APPLICATIONS: MANUFACTURING UNITS PHARMA SUITICAL INDUSTRY HOSPITAL INDUSTRIES FOOD INDUSTRIES

CAT REF. No.	WATTAGE	сст	MRP(₹)
PCCR045C	45	6500	10925
PCCR045N	45	4000	10925
PCCR045W	45	3000	10925
PCCR080C	80	6500	17100
PCCR080N	80	4000	17100
PCCR080W	80	3000	17100

PF: >0.95 | SURGE PROTECTION: >5KV (Internal), 10KV (External) | THD: <10%



# **Orbit Post Top**

- Housing is made of aluminum alloy
- Anti Aging spray treatment is done on the housing for longer life
- Poly carbonate diffuser is provided for glare free soft light output
- Available in cool white & warm white CCT



□ B □ □	ALL	DIMENSIO	NS IN MM	I
	WATTAGE	Α	В	С
À	20	270	250	77



CAT REF. No.	WATTAGE	сст	MRP(₹)		
Optical Cover Clear					
APOR020C	20	5700	7500		

\*Available in 4000K & 3000K also

# **Orbit Neo Post Top**

- Housing is made of aluminum alloy
- Anti Aging spray treatment is done on the housing for longer life
- Poly carbonate diffuser is provided for glare free soft light output
- Available in cool white & warm white CCT





□ B □ □	ALL	DIMENSIO	NS IN MM	
	WATTAGE	Α	В	С
À	40	400	415	66

CAT REF. No.	WATTAGE	сст	MRP(₹)		
Optical Cover Clear					
APOR040C	40	5700	12750		

\*Available in 4000K & 3000K also

# **Bright Yard Post Top**

- Elegant design with powder coated finish using high heat conductivity material which increases heat dissipation
- Anti Aging spray treatment is done on the housing for longer life
- Poly carbonate diffuser is provided for glare free soft light output



B	٦
	A
<u></u>	

ALL DIMENSIONS IN MM				
WATTAGE	Α	В	С	
20	330	225	50	
25	410	390	70	
40	410	340	70	
70	410	340	70	





System Efficacy >110lm/w



AC 120 -300 V ,50 Hz.



50,000 hr



CRI 80+



IP 65

**APPLICATIONS** 



**GARDEN LIGHTING** 



PATHWAY LIGHTING



**TOWNSHIP** 

CAT REF. No.	WATTAGE	сст	MRP(₹)	CAT REF. No.	WATTAGE	сст	MRP(₹)
	Optical Cover	Clear			Optical Cover I	rosted	
APBY020C	20	5700	7000	APBY020C	20	5700	7000
APBY020W	20	3000	7250	APBY020W	20	3000	7250
APBY025C	25	5700	8500	APBY025C	25	6500	8500
APBY025W	25	3000	8650	APBY025W	25	3000	8650
APBY040C	40	5700	9200	APBY040C	40	6500	9200
APBY040W	40	3000	9300	APBY040W	40	3000	9300
APBY070C	70	5700	14000	APBY070C	70	6500	14000
APBY070W	70	3000	14200	APBY070W	70	3000	14200

\*Available in 4000K also





# **Fabio Bollard**

- Compact cylindrical design, suitable for bollard application
- Anti Aging spray treatment is done on the housing for longer life
- Impact resistant clear protector for glare free soft light output
- Available in cool white & warm white colour temperature





B	ALL DIMENSIONS IN I			
	WATTAGE	Α	В	
A	12	800	165	

CAT REF. No.	WATTAGE	сст	MRP(₹)
OGFB012C	12	5700	10500
OGFB012W	12	3000	10500

# **Mirage Led Bollard**

- Compact cylindrical design suitable for bollar application d
- long life, aesthetically designed with symmetrical light distribution,
- Impact-resistant protector and durable silicone gasket.



В _	ALL DIMENSIONS IN			
	WATTAGE	Α	В	
Â	Upto 12	620	90	

#### PRODUCT FEATURES



AC 120 -300 V, 50 Hz.



50,000 hr



CRI 80+



IP 65

#### APPLICATIONS



**GARDEN LIGHTING** 



**PATHWAY LIGHTING** 



**TOWNSHIP** 

CAT REF. No.	WATTAGE	сст	MRP(₹)
OGMRB000	Upto 12	5700	5664
OGMRB000	Upto 12	3000	5664



# **Heritage Bollard**

- High luminous efficiency at reduced wattage.
- Elegant, Robust design.





System Efficacy > 100lm/w



AC 120 -300 V, 50 Hz.



CRI 80+

IP 65





APPLICATIONS

GARDEN LIGHTING



PATHWAY LIGHTING



TOWNSHIP



СВ	ALL DIMENSIONS IN MM					
	WATTAGE	Α	В	С		
	12	800	320	210		

CAT REF. No.	WATTAGE	ССТ	MRP(₹)
OGFB012C	12	6500	7000
OGFB012W	12	3000	7000

# **Antique Bollard**

- Die cast aluminium housing with high corrosion resistance surface finish
- Available in B 22 holder which give choice of different wattages



	ALL DIMENSIONS IN MM			
I H	WATTAGE	Α	В	
A L	UPTO 20	800	240	

#### **PRODUCT FEATURES**



AC 120 -300 V, 50 Hz.



IP 65

#### **APPLICATIONS**



**GARDEN LIGHTING** 



PATHWAY LIGHTING



TOWNSHIP

CAT REF. No.	WATTAGE	MRP(₹)
OGFB00001042	UPTO 20 W	5500



# **Stream Strip Light**

- Stream outdoor flexible strip is designed to perform in harsh outdoor conditions.
- The silica gel inside the tube helps in checking the yellowing effect of the strip light.
- Excellent color consistency

#### **PRODUCT FEATURES:**



System Efficacy > 100lm/w



AC 120 -300 v, 50 hz



25,000 hr



IP 65

#### **APPLICATIONS:**



**SIGNAGES** 



**BUILDING HIGHLIGHTING** 



CAT REF. No.	WATTAGE	сст	MRP(₹)
RUSR006C	6W	6500K	7990
RUSR006W	6W	3000K	7990
RUSR006B	6W	BLUE	7990
RUSR006G	6W	GREEN	7990
RUSR006R	6W	RED	7990
RUSR006P	6W	PINK	7990

PRODUCT Description	PRODUCT CODE	MRP(₹)
Power Adapter	GUPA000U1840	475.00

# **Lynx Spyke Light**

- Diecast aluminium housing with grey or black powder coated finish.
- To aim the object adjustable mounting bracket with spike is provided
- Degree of protection: IP66





CAT REF. No.	WATTAGE	сст	MRP(₹)
SLMLY005W	5W	3000K	2650
SLMLY010W	10W	10W 3000K	
SLMLY015W	15W	3000K	7950
SLMLY020W	20W	3000K	10600

Also Available in – Red, Green, Blue & White Colour



# **Crest Spot Track**

- Aesthetically designed accent lights with optics made of high quality aluminium
- High CRI properties to take the attention of your customers to the merchandise
- High efficiency glass for lesser transmission loss
- High efficiency reflector with anodized aluminium
- High quality powder coated luminaire housing





ALL DIMENSIONS IN MM					
WATTAGE A B					
10	155	45			
15	185	55			
20	185	55			
30	230	65			
40	230	65			





AC 120 -300 V, 50 Hz.



25,000 hr



CRI 80+



IP 20

**APPLICATIONS** 



RETAIL SPACES



APPAREL STORE



**JEWELLERY** 

CAT REF. No.	WATTAGE	ССТ	MRP(₹)
TCCR010C	10	6500	2800
TCCR010N	10	4000	2800
TCCR010W	10 3000		3000
TCCR015C	15	6500	3850
TCCR015N	15	4000	3850
TCCR015W	15	15 3000	
TCCR020C	20	6500	5200
TCCR020N	20	4000	5200
TCCR020W	20	3000	5250

CAT REF. No.	WATTAGE	сст	MRP(₹)
TCCR030C	30	6500	5700
TCCR030N	30	4000	5700
TCCR030W	30	3000	5750
TCCR040C	40	6500	7250
TCCR040N	40	4000	7250
TCCR040W	40	3000	7350

<sup>\*</sup>Also available in Black

<sup>\*\*</sup>Track to be ordered separately

# **Vista Spot Zoom**

- Can be tilted to one side or fixed in a central position,
- Applicable as a directional spotlight and as a fixed downlight
- High efficiency reflector with silver anodized aluminium
- High efficiency glass for lesser transmission loss



#### PRODUCT FEATURES

System Efficacy >110lm/w



AC 120 -300 V, 50 Hz.



25,000 hr



CRI 80+



IP 20

**APPLICATIONS** 



**RETAIL SPACES** 



**EXHIBITION SPACES** 



APPAREL STORE



**JEWELLERY** 



B	ALL DIMENSIONS IN MM			
	WATTAGE	Α	В	С
	20	135	110	127
SAP A	30	165	140	140
oc ∌	30	165	140	165
	30	165	140	191

CAT REF. No.	WATTAGE	сст	MRP(₹)
QCVT015C	15	6500	3098
QCVT015N	15	4000	3098
QCVT015W	15	3000	3098
QCVT020C	20	6500	4375
QCVT020N	20	4000	4375
QCVT020W	20	3000	4375
QCVT030C	30	3000	5075
QCVT030N	30	4000	5075
QCVT030W	30	3000	5075



# **Sniper Spot Light**

- Pressure die cast aluminium body to ensure efficient heat dissipation and long life of the light source.
- Perfect optics to provide crisp and uniform beams.
- Consistent light output





CAT REF. No.	WATTAGE	сст	MRP(₹)
DCSN010C	10	6500	2800
DCSN010N	10	4000	2800
DCSN010W	10	3000	2800
DCSN015C	15	6500	3325
DCSN015N	15	4000	3325
DCSN015W	15	3000	3325
DCSN020C	20	6500	3675
DCSN020N	20	4000	3675
DCSN020W	20	3000 3675	

CAT REF. No.	WATTAGE	сст	MRP(₹)
DCSN030C	30	6500	4130
DCSN030N	30	4000	4130
DCSN030W	30	3000	4130
DCSN045C	45	6500	5250
DCSN045N	45	4000	5250
DCSN045W	45	3000	5250

# **Ace Spot Light**

- Available in 1\*20 and 2\*20
- Energy efficient and better light quality.
- spot distribution gives better lighting control.
- Aesthetically designed, enhance your lighting quality and ceiling décor.

#### PRODUCT FEATURES



System Efficacy >110lm/w



AC 120 -300 V, 50 Hz.



25,000 hr



CRI 80+



IP 20

**APPLICATIONS** 



**RETAIL SPACES** 



**EXHIBITION SPACES** 



APPAREL STORE



JEWELLERY



CAT REF. No.	WATTAGE	ССТ	MRP(₹)
SCAC020C	1*20	6500	4655
SCAC020N	1*20	4000	4655
SCAC020W	1*20	3000	4655

# **Ace Spot Light**

- Available in 1\*20 and 2\*20
- Energy efficient and better light quality.
- spot distribution gives better lighting control.
- Aesthetically designed, enhance your lighting quality and ceiling décor.



	ALL	ALL DIMENSIONS IN MM				
H W	WATTAGE	L	W	Н	С	
L	2*20	212	112	115	195X100	
C .						



CAT REF. No.	WATTAGE	сст	MRP(₹)
SCAC040C	2*20	6500	8050
SCAC040N	2*20	4000	8050
SCAC040W	2*20	3000	8050



#### COMMERCIAL

### **Aculux**

- Aculux Series 2'X 2' with a superior efficacy of 120lm/W.
- These are excellent alternatives to traditional fluorescent troffers.
- The thin and light weight back lit design easily lays into drop ceilings.
- Elegantly designed luminaire which provides the occupants with a refreshing and comforting experience through its uniform and glare-free light.



	ALL DIMENSIONS IN MM				
	WATTAGE	Α	В	С	
	30	595	595	35	
. 2	36	595	595	35	

# PRODUCT FEATURES System Efficacy > 120lm/w AC 120 -300 V ,50 Hz. 50,000 hr CRI 80+

APPLICATIONS
OFFICES



111	AIRPORT LOUNGE

HOSPITAL

BANKS
IT/ITES

CAT REF. No.	WATTAGE	ССТ	MRP(₹)
PCAC030C	30	6500	6175
PCAC030N	30	4000	6175
PCAC030W	30	3000	6175
PCAC036C	36	6500	6650
PCAC036N	36	4000	6650
PCAC036W	36	3000	6650

\*Surface also available at extra cost.


PF: >0.95 | SURGE PROTECTION: >4KV | THD: <10%



- Vision Pro Series 2'X 2' with a superior efficacy of 110lm/W.
- These are excellent alternatives to traditional fluorescent troffers.
- The thin and light weight back lit design easily lays into drop ceilings.
- The LED and flat combination provides an energy efficient luminaire (up to 60% savings over traditional fluorescent lights),
- Elegantly designed luminaire which provides the occupants with a refreshing and comforting experience through its uniform and glare-free light.

PRODUCT FEATURES:







CRI 80+

IP 20



**OFFICES** 













	ALL DI	MENSIONS	IN MM	
	WATTAGE	Α	В	С
No.	18	300	300	20
	36	595	595	35
	42	595	595	35

CAT REF. No.	WATTAGE	ССТ	MRP(₹)	
PCVP018C	18	6500	2200	
PCVP018N	18	4000	2200	
PCVP018W	18	3000	2300	
PCVP036C	36	6500	4400	*F
PCVP036N	36	4000	4400	
PCVP036W	36	3000	4500	

CAT REF. No.	WATTAGE	сст	MRP(₹)
PCVP042C	42	6500	5500
PCVP042N	42	4000	5500
PCVP042W	42	3000	5600
+D (			

\*Recess to surface convertible ring also available at extra cost.



#### COMMERCIAL

# **Vision Pro 1X4 Recess & Surface**

- Non yellowing opal polycarbonate diffuser for better light distribution
- Suitable for recess, surface & pendant also
- CRCA housing with white powder coated finishing
- High transmittance diffuser for glare free symmetric light distribution



ALL DIMENSIONS IN MM			
WATTAGE	А	В	С
 36	1195	295	11

CAT REF. No.	WATTAGE	ССТ	MRP(₹)
PCVP036C	36	6500	5510
PCVP036N	36	4000	5510
PCVP036W	36	3000	5510

# **Lineo Surface / Suspended**

- Extruded aluminium housing in white powder coated finish
- Smart efficient design for uniform distribution of light
- Aesthetically designed polycarbonate diffuser for higher light transmission
- Ceiling installation specially designed wire suspenders ceiling coupler
- Longer life & low power consumption
- Suitable for suspended or surface mounting



F	PRODUCT FEATURES
	System Efficacy >110lm/w
<b>(3)</b>	AC 120 -300 V, 50 Hz.
Ċ	25,000 hr
	CRI 80+
	IP 20
	APPLICATIONS
	OFFICES



MEETING ROOMS





**EDUCATIONAL FACILITIES** 



LIBRARIES

s C	ALL DIMENSIONS IN MM				
	WATTAGE	Α	В	С	
	20	1210	110	70	
	40	1210	110	70	

CAT REF. No.	WATTAGE	сст	MRP(₹)
ZCLI020C	20	6500	6150
ZCLI020N	20	4000	6200
ZCLI020W	20	3000	6200
ZCLI040C	40	6500	7790
ZCLI040N	40	4000	7790
ZCLI040W	40	3000	7790



### **Lineo Tech Zone**

- Extruded aluminium housing in white powder coated finish
- The clean design and high luminous intensity levels makes it ideal solutions for corporate offices & institutions
- Aesthetically designed high transmittance polycarbonate diffuser
- Longer life & low power consumption
- Suitable for recess mounting



	ALL DIMENSIONS IN MM				
C 🔼	WATTAGE	Α	В	С	
	28	1195	145	81	
A	40	1195	145	81	

# PRODUCT FEATURES System Efficacy > 110lm/w AC 120 -300 V, 50 Hz. 25,000 hr CRI 80+ IP 20 APPLICATIONS OFFICES EDUCATIONAL FACILITIES MEETING ROOMS LIBRARIES IT/ ITES

CAT REF. No.	WATTAGE	сст	MRP(₹)
ZCLI028C	28	6500	7125
ZCLI028N	28	4000	7125
ZCLI028W	28	3000	7125
ZCLI040C	40	6500	7790
ZCLI040N	40	4000	7790
ZCLI040W	40	3000	7790

PF: >0.95 | SURGE PROTECTION: >4KV | THD: <10%

## **Comfy Bed Light**

- Specially designed patient bedlight with glare free downlight for reading, examination and uplight for ambient lighting.
- Uniform soothing up-down light.
- Aesthetically designed
- Inbuilt night lamp mode

#### **PRODUCT FEATURES**



System Efficacy >110lm/w



AC 120 -300 V, 50 Hz.



25,000 hr



CRI 80+



IP 20

**APPLICATIONS** 



OFFICES



**MEETING ROOMS** 



**BED ROOM** 



HOSPITAL



**READING ROOM** 



	ALL DIMENSIONS IN MM				
СĒ	WATTAGE	С			
	32	590	90	135	
Α	80	762	90	135	

CAT REF. No.	WATTAGE	ССТ	MRP(₹)
BWCW032C	32	6500	8500
BWCW080C	80	6500	16500

\*Available in 4000K & 3000K also \*Also Available for Smart Applications



## **Sheen Deep Recessed Down Light**

- Sheen down light is made with aluminium housing with architectural white finish
- It is designed to deliver a superior 80+ CRI light.
- High efficiency reflector enables the luminaire to deliver higher light output
- Frosted polycarbonate diffuser for glare free uniform light distribution



	ALL DIMENSIONS IN MM				
B	WATTAGE	Α	В	С	
	6	110	50	85	
	12	132	70	100	
	15	132	70	100	
	18	175	105	145	
	24	175	105	145	



CAT REF. No.	WATTAGE	ССТ	MRP(₹)
DCSE006C	6	6500	800
DCSE006N	6	4000	800
DCSE006W	6	3000	850
DCSE012C	12	6500	1200
DCSE012N	12	4000	1200
DCSE012W	12	3000	1250
DCSE015C	15	6500	1400
DCSE015N	15	4000	1400
DCSE015W	15	3000	1450
DCSE018C	18	6500	1850
DCSE018N	18	4000	1850
DCSE018W	18	3000	1900
DCSE024C	24	6500	2400
DCSE024N	24	4000	2400
DCSE024W	24	3000	2450

PF: >0.95 | SURGE PROTECTION: >4KV | THD: <10%

## **Kolor Dot Spot Light**

- Designed to light bookshelves, cabinets, desks
- Compact and eco-friendly design
- Thoroughly tested and verified

#### **PRODUCT FEATURES**



System Efficacy > 100lm/w



AC 120 -300 V, 50 Hz.



25,000 hr



CRI 80+



IP 20

**APPLICATIONS** 



LIVING ROOM



DRESS ROOM



SHOPS



в	ALL DIMENSIONS IN MM				
	WATTAGE	Α	В	С	
A (9 %)	2	39	29	32	

CAT REF. No.	WATTAGE	ССТ	MRP(₹)
SCKE002C	2	6500	199
SCKE002W	2	3000	199
SCKE002R	2	RED	199
SCKE002B	2	BLUE	199
SCKE002G	2	GREEN	199



# **Novus LED Spot**

- Wide trim facilitates recess mounting
- Suitable for generating flexible accent lighting
- High efficiency reflector with anodized aluminium





ALL DIMENSIONS IN MM				
WATTAGE	Α	В	С	
3	65	40	55	
6	85	45	72	
9	100	50	82	
12	115	55	100	
15	115	55	100	
30	165	65	140	

#### **PRODUCT FEATURES:**



System Efficacy > 100lm/w



AC 120 -300 v, 50 hz



50,000 hr



CRI 80 +



IP 20

#### APPLICATIONS:



**RETAIL SPACES** 



RESTAURANTS



ART & CULTURE ESTABLISHMENTS



HOSPITALITY



SHOP

CAT REF. No.	WATTAGE	сст	MRP(₹)
SCNV003C	3	6500	650
SCNV003N	3	4000	650
SCNV003W	3	3000	700
SCNV006C	6	6500	900
SCNV006N	6	4000	900
SCNV006W	6	3000	950
SCNV009C	9	6500	1100
SCNV009N	9	4000	1100
SCNV009W	9	3000	1150

CAT REF. No.	WATTAGE	ССТ	MRP(₹)
SCNV012C	12	6500	1350
SCNV012N	12	4000	1350
SCNV012W	12	3000	1400
SCNV015C	15	6500	1650
SCNV015N	15	4000	1650
SCNV015W	15	3000	1700
SCNV030C	30	6500	3200
SCNV030N	30	4000	3200
SCNV030W	30	3000	3350

\*Also available in Square

## **Regalia Surface Panel Round**

- Regalia Slim led down light is slim and stylish designed.
- High performance and high transmittance PMMA diffuser allows optimum light out put with high uniformity.
- With unique surface ring, any existing downlight can be easily insert inside the ring for surface application
- No harmful UV & IR radiation
- Frosted polycarbonate diffuser for glare free uniform light distribution

OFFICE

**RETAIL STORE** 

**BANKS** 






25,000 hr







#### Restrurant

CAT REF. No.	WATTAGE	сст	MRP(₹)	CAT REF. No.	WATTAGE	сст	MRP(₹)
PCRG006C	6W	6500K	695	PCRG018C	18W	6500K	1295
PCRG006N	6W	4000K	695	PCRG018N	18W	4000K	1295
PCRG006W	6W	3000K	695	PCRG018W	18W	3000K	1295
PCRG006B	6W	BLUE	695	PCRG018B	18W	BLUE	1295
PCRG006G	6W	GREEN	695	PCRG018G	18W	GREEN	1295
PCRG006P	6W	PINK	695	PCRG018P	18W	PINK	1295
PCRG006R	6W	RED	695	PCRG018R	18W	RED	1295
PCRG012C	12W	6500K	895	PCRG024C	24W	6500K	1695
PCRG012N	12W	4000K	895	PCRG024N	24W	4000K	1695
PCRG012W	12W	3000K	895	PCRG024W	24W	3000K	1695
PCRG012B	12W	BLUE	895	PCRG024B	24W	BLUE	1695
PCRG012G	12W	GREEN	895	PCRG024G	24W	GREEN	1695
PCRG012P	12W	PINK	895	PCRG024P	24W	PINK	1695
PCRG012R	12W	RED	895	PCRG024R	24W	RED	1695



## **Regalia Surface Panel Square**

- Regalia Slim led down light is slim and stylish designed.
- High performance and high transmittance PMMA diffuser allows optimum light out put with high uniformity.
- With unique surface ring, any existing downlight can be easily insert inside the ring for surface application
- Frosted polycarbonate diffuser for glare free uniform light distribution



		ALL DIN	<b>IENSIONS</b>	IN MM
	m1	WATTAGE	Α	В
	-	6	90	25
	Щ	12	120	25
A	В	18	156	25
		24	190	25



CAT REF. No.	WATTAGE	сст	MRP(₹)	CAT REF. No.	WATTAGE	сст	MRP(₹)
PCRG006C	6W	6500K	695	PCRG018C	18W	6500K	1295
PCRG006N	6W	4000K	695	PCRG018N	18W	4000K	1295
PCRG006W	6W	3000K	695	PCRG018W	18W	3000K	1295
PCRG006B	6W	BLUE	695	PCRG018B	18W	BLUE	1295
PCRG006G	6W	GREEN	695	PCRG018G	18W	GREEN	1295
PCRG006P	6W	PINK	695	PCRG018P	18W	PINK	1295
PCRG006R	6W	RED	695	PCRG018R	18W	RED	1295
PCRG012C	12W	6500K	895	PCRG024C	24W	6500K	1695
PCRG012N	12W	4000K	895	PCRG024N	24W	4000K	1695
PCRG012W	12W	3000K	895	PCRG024W	24W	3000K	1695
PCRG012B	12W	BLUE	895	PCRG024B	24W	BLUE	1695
PCRG012G	12W	GREEN	895	PCRG024G	24W	GREEN	1695
PCRG012P	12W	PINK	895	PCRG024P	24W	PINK	1695
PCRG012R	12W	RED	895	PCRG024R	24W	RED	1695

## Flexa Slim Adjustable Panel

- Flexa is Adjustable, slim & stylish designed edgelit Panel
- Flexa is recess mounting edge lit panel, suitable for mounting with in Cutout Range from 75mm to 200mm With an unique mounting arrangement.
- Flexa has Robust Design with an Integrated driver & available in both round & square shape
- It has a wide diffuser with high lumen output






	ALL DIMENSIONS IN MM				
<b>4</b>	WATTAGE	MIN	MAX		
	12	75	100		
	18	75	150		
	24	75	200		

CAT REF. No.	WATTAGE	ССТ	MRP(₹)
PCFL012C	12	6500K	924
PCFL018C	18	4000K	1188
PCFL024C	24	3000K	1804

# **Stream Soft Strip Light**

- Flexible LED strip adapts to all shapes and sizes.
- Self adhesive 3M tape on the back for ease of installation
- With an excellent colour consistency, it is a perfect product for creating seamless & soothing lighting effects.

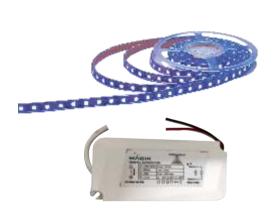



CAT REF. No.	WATTAGE	сст	MRP(₹)
RUSR006C	5W/mtr	6500K	1249
RUSR005R	5W/mtr	Red	1249
RUSR005G	5W/mtr	Green	1249
RUSR005B	5W/mtr	Blue	1249
RUSR005W	5W/mtr	3000K	1249

<sup>\*</sup>Available with adapter



# **Magna Surface Panel**

- Magna surface panel led down light is slim and stylish designed.
- High performance and high transmittance PMMA diffuser allows optimum light out put with high uniformity.
- With unique surface ring, any existing downlight can be easily insert inside the ring for surface application

# System Efficacy > 100lm/w AC 120 - 300 V ,50 Hz. 25,000 hr CRI 80+ IP 20 APPLICATIONS: OFFICE SHOPS BANKS INDUSTRIES HOMES




	11	ALL DIMENSIONS IN MM				
		WATTAGE	Α	В		
	В	8	40	83		
		15	42	140		

CAT REF. No.	WATTAGE	ССТ	MRP(₹)	CAT REF. No.	WATTAGE	сст	MRP(₹)
PCMG008C	8W	6500K	450	PCMG015C	15W	6500K	750
PCMG008W	8W	3000K	450	PCMG015W	15W	3000K	750
PCMG008P	8W	PINK	450	PCMG015P	15W	PINK	750
PCMG008G	8W	GREEN	450	PCMG015G	15W	GREEN	750
PCMG008B	8W	BLUE	450	PCMG015B	15W	BLUE	750
PCMG008R	8W	RED	450	PCMG015R	15W	RED	750
PCMG008L	8W	PURPLE	450	PCMG015L	15W	PURPLE	750

# **Azure Slim Downlighter Square**

- Azure Slim led down light is slim and stylish designed.
- High performance and high transmittance PMMA diffuser allows optimum light out put with high uniformity.
- With unique surface ring, any existing downlight can be easily insert inside the ring for surface application
- Suitable for both surface mounting & recess Mounting







CAT REF. No.	WATTAGE	сст	MRP(₹)	CAT REF. No.	WATTAGE	сст	MRP(₹)
DCAZ005C	5W	6500	575	DCAZ015C	15W	6500	850
DCAZ005N	5W	4000	575	DCAZ015N	15W	4000	850
DCAZ005W	5W	3000	575	DCAZ015W	15W	3000	850
DCAZ010C	10W	6500	695	DCAZ022C	22W	6500	1295
DCAZ010N	10W	4000	695	DCAZ022N	22W	4000	1295
DCAZ010W	10W	3000	695	DCAZ022W	22W	3000	1295



# **Azure Slim Downlighter Round**

- Azure Slim led down light is slim and stylish designed.
- High performance and high transmittance PMMA diffuser allows optimum light out put with high uniformity.
- With unique surface ring, any existing downlight can be easily insert inside the ring for surface application
- Suitable for both surface mounting & recess Mounting



#### PRODUCT FEATURES:

System Efficacy > 100lm/w



AC 120 -300 V ,50 Hz.



25,000 hr



CRI 80+



IP 20

#### **APPLICATIONS:**



GYM/ SPA



**OFFICE** 



SHOPS



**BANKS** 



**INDUSTRIES** 



**HOMES** 



	ALL	ALL DIMENSIONS IN MM				
(())	WATTAGE	Α	В	С		
	5	85	38	65		
. В	10	112	38	90		
A.	15	167	38	147		
@ "`	22	200	38	180		

CAT REF. No.	WATTAGE	ССТ	MRP(₹)	CAT REF. No.	WATTAGE	ССТ	MRP(₹)
DCAZ005C	5W	6500	575	DCAZ015C	15W	6500	850
DCAZ005N	5W	4000	575	DCAZ015N	15W	4000	850
DCAZ005W	5W	3000	575	DCAZ015W	15W	3000	850
DCAZ010C	10W	6500	695	DCAZ022C	22W	6500	1295
DCAZ010N	10W	4000	695	DCAZ022N	22W	4000	1295
DCAZ010W	10W	3000	695	DCAZ022W	22W	3000	1295

# **Azure Slim Surface Ring**

 Unique surface ring for Azure Slim down light which can be easily insert inside the ring for surface application



	ALL DIM	ALL DIMENSIONS IN MM				
	WATTAGE	Α	В			
	5	85	38			
	10	112	38			
В	15	167	38			
	22	200	38			

		ALL DIMENSIONS IN MM				
	nt	WATTAGE	Α	В		
		5	85	38		
	샙	10	112	38		
^	В	15	167	38		
		22	200	38		

CAT REF. No.	WATTAGE	MRP(₹)
DCAR0050	5 RD	120
DCAR0100	10RD	175
DCAR0150	15 RD	175
DCAR0220	22 RD	250
DCAR0050	5 SQ	120
DCAR0100	10 SQ	175
DCAR0150	15 SQ	175
DCAR0220	22 SQ	250



## **Helio Slim Panel Round**

- Slim Panel light is a latest energy saving solution for unique & stylish indoor lighting
- It is multipurpose, well suited for home & office environment.
- It has a well-designed efficient thermal management system.
- Made of Aluminum alloy and side lit reflector sheet for high brightness, performance and efficiency.





	ALL DIMENSIONS IN MM			
⊢ A →	WATTAGE	Α	В	С
*	3	85	12	72
⊤B	6	120	12	110
	12	170	12	160
$\mathcal{A}$	15	170	12	160
@ 0c	18	225	12	210
	24	300	12	285

CAT REF. No.	WATTAGE	ССТ	MRP(₹)
PCHP003C	3	6500	400
PCHP003N	3	4000	400
PCHP003W	3	3000	400
PCHP006C	6	6500	665
PCHP006N	6	4000	665
PCHP006W	6	3000	665
PCHP012C	12	6500	945
PCHP012N	12	4000	945
PCHP012W	12	3000	945

CAT REF. No.	WATTAGE	сст	MRP(₹)
PCHP015C	15	6500	985
PCHP015N	15	4000	985
PCHP015W	15	3000	985
PCHP018C	18	6500	1210
PCHP018N	18	4000	1210
PCHP018W	18	3000	1210
PCHP024C	24	6500	2035
PCHP024N	24	4000	2035
PCHP024W	24	3000	2035

## **Helio Slim Panel Square**

- Slim Panel light is a latest energy saving solution for unique & stylish indoor lighting
- It is multipurpose, well suited for home & office environment.
- It has a well-designed efficient thermal management system.
- Made of Aluminum alloy and side lit reflector sheet for high brightness, performance and efficiency.



	ALL	ALL DIMENSIONS IN MM			
⊩— A —	WATTAGE	Α	В	С	
4	3	85	12	72	
L B	6	120	12	110	
	12	170	12	160	
4	15	170	12	160	
9 /	18	225	12	210	
	24	300	12	285	

#### PRODUCT FEATURES:



System Efficacy >90lm/w



AC 120 -300 v, 50 hz



25,000 hr



CRI 80 +



IP 20

#### **APPLICATIONS:**



SHOPS



**HOMES** 



**BANKS** 



OFFICE

CAT REF. No.	WATTAGE	сст	MRP(₹)
PCHP003C	3	6500	400
PCHP003N	3	4000	400
PCHP003W	3	3000	400
PCHP006C	6	6500	665
PCHP006N	6	4000	665
PCHP006W	6	3000	665
PCHP012C	12	6500	945
PCHP012N	12	4000	945
PCHP012W	12	3000	945

CAT REF. No.	WATTAGE	сст	MRP(₹)
PCHP015C	15	6500	985
PCHP015N	15	4000	985
PCHP015W	15	3000	985
PCHP018C	18	6500	1210
PCHP018N	18	4000	1210
PCHP018W	18	3000	1210
PCHP024C	24	6500	2035
PCHP024N	24	4000	2035
PCHP024W	24	3000	2035

# **Maximo Line Batten (ALU)**

- Maximo line is defined by its robust construction offering solid performance with easy installation and low energy consumption.
- Engineered to offer a very high accuracy of color for the area to be lit.
- Unique design and solid construction makes it fit for applications on walls & on ceiling mounting.





CAT REF. No.	WATTAGE	сст	MRP(₹)
BWMP010C	10 (2ft)	6500K	580
BWMP010W	10 (2ft)	3000K	580
BWMP020C	20 (4ft)	6500K	950
BWMP020W	20 (4ft)	3000K	950


### **Ultima Pro Batten**

- Ultima Pro LED battens are long lasting home lighting solutions for brilliant lighting and perfect visual effect.
- It provides value for money with high luminous efficacy
- Spotless light output that maximizes coverage through wide and uniform light distribution
- Reduced operational cost with reduced energy consumption
- Lower maintenance cost




CAT REF. No.	WATTAGE	сст	MRP(₹)
BWUP020C	20W	6500K	325
BWUP020W	20W	3000K	325



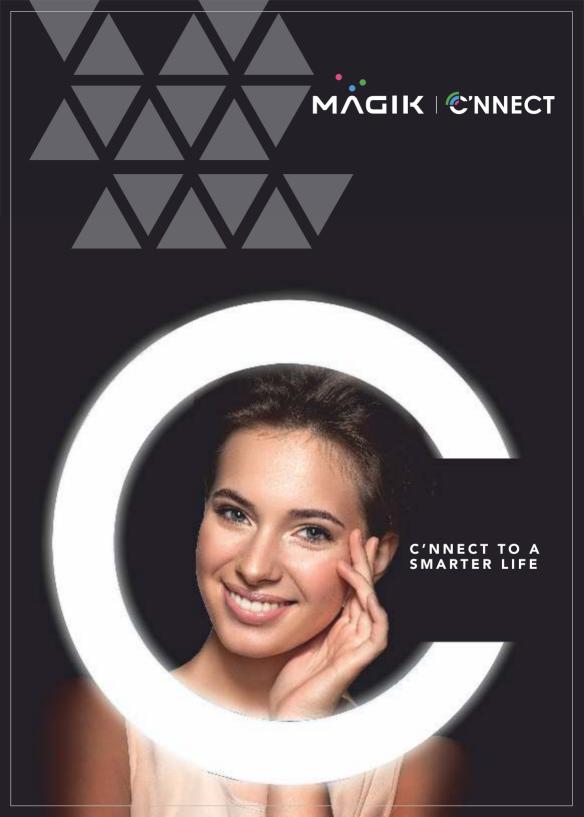

# **Evoke** Spotlight With Trim

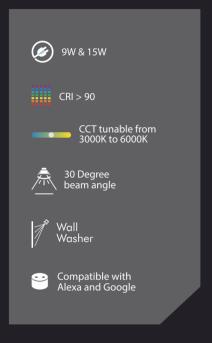



CAT REF. No.	WATTAGE	сст	MRP
CTEV009T3000TMW	9W	Tunable 3000K to 6500K	2700
CTEV015T3005TMW	15W	Tunable 3000K to 6500K	3000










Available in Silver

Sand Gold

**Black** 

# **Evoke** Spotlight Trimless



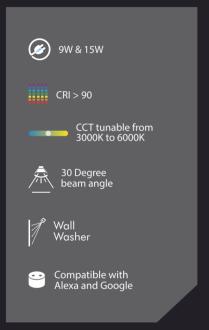



CAT REF. No.	WATTAGE	сст	MRP
CTEV009T3009TLW	9W	Tunable 3000K to 6500K	2700
CTEV015T3013TTLW	15W	Tunable 3000K to 6500K	3000









Available in Silver

White

Black

# **Swivel** Spotlight With Trim





CAT REF. No.	WATTAGE	сст	MRP
CTSW009T3017TMW	9W	Tunable 3000K to 6500K	2700
CTSW015T3020TMW	15W	Tunable 3000K to 6500K	3000







Available in Silver

White

Black

# **Swivel** Spotlight **Trimless**





9W & 15W



CRI > 90



CCT tunable from 3000K to 6000K



35 Degree beam angle



Wall Washer



Compatible with Alexa and Google







75 mm Cut out size

CAT REF. No.	WATTAGE	сст	MRP
CTSW009T3023TLW	9W	Tunable 3000K to 6500K	2700
CTSW015T3020TMW	15W	Tunable 3000K to 6500K	3000








Available in Silver

White

Black

# Follow Spotlight With Trim

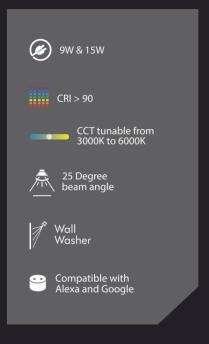



CAT REF. No.	WATTAGE	сст	MRP
CTFO009T3037TMW	9W	Tunable 3000K to 6500K	3000
CTFO015T3039TMW	15W	Tunable 3000K to 6500K	3500





Black

# Follow Spotlight Trimless





9W & 15W



CRI > 90



CCT tunable from 3000K to 6000K



25 Degree beam angle



Wall Washer



Compatible with Alexa and Google







75 mm Cut out size

CAT REF. No.	WATTAGE	сст	MRP
CTFO009T3041TLW	9W	Tunable 3000K to 6500K	3000
CTFO015T3043TLW	15W	Tunable 3000K to 6500K	3500



White



Available in

Black

# Focus Spotlight With Trim





CAT REF. No.	WATTAGE	сст	MRP
CTFC009T3029TMW	9W	Tunable 3000K to 6500K	2700
CTFC015T3031TMW	15W	Tunable 3000K to 6500K	3000





Available in



Black

# Focus Spotlight Trimless





9W & 15W





CCT tunable from 3000K to 6000K



25 Degree beam angle





Compatible with Alexa and Google



CAT REF. No.	WATTAGE	сст	MRP
CTAC009T3033TLW	9W	Tunable 3000K to 6500K	2700
CTAC015T3035TLW	15W	Tunable 3000K to 6500K	3000








Available in

Black

# Adore Spotlight With Trim

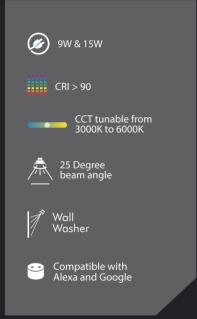







180 X 92 mm Cut out size


CAT REF. No.	WATTAGE	сст	MRP
CTAD009T3055TMW	9W	Tunable 3000K to 6500K	6300
CTAD015T3056TMW	15W	Tunable 3000K to 6500K	7000

Available in



White





# Aspire Spotlight With Trim





9W & 15W



CRI > 90



CCT tunable from 3000K to 6000K



25 Degree beam angle



Wall <u>Was</u>her



Compatible with Alexa and Google







182 X 82 mm Cut out size

CAT REF. No.	WATTAGE	сст	MRP
CTAS009T3053TMW	9W	Tunable 3000K to 6500K	4000
CTAS015T3054TMW	15W	Tunable 3000K to 6500K	4500




White



Available in

Black

# **Dazzle Deep Downlight**

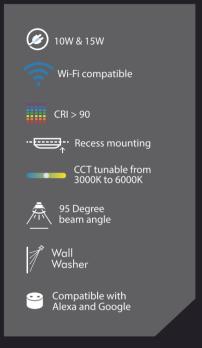




10W	J <sub>S8mm</sub> Dimensions 95*58mm	95mm Cut out size
15W	]58mm Dimensions 148*58	145 mm Cut out size

CAT REF. No.	WATTAGE	сст	MRP
CTDZ010T3045	9W	Tunable 3000K to 6500K	1200
CTDZ015T3046	15W	Tunable 3000K to 6500K	1600

# **Strip Light - RGB**





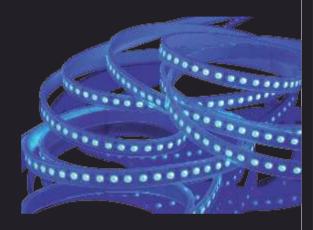


Dimensions
12 length x 3.7 height

CAT REF. No.	LENGTH	сст	MRP
CTFXRGB3048	5M	RGB Colour	4500


# **Strip Light - CCT**



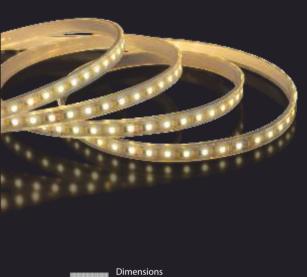

12 length x 3.7 height

CAT REF. No.	LENGTH	сст	MRP
CTFXCCT3047	5M	RGB Colour	3500








WATTAGE	сст	MRP
3.75W per Feet	RGB Colour	POR

# **Linear Delta**

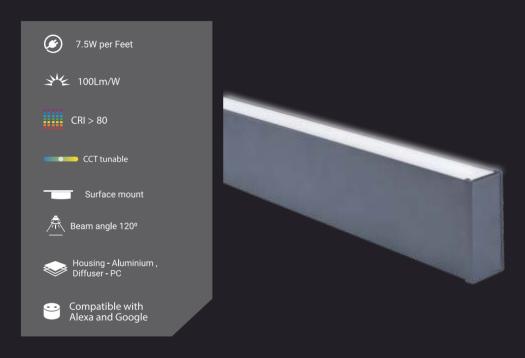

WATTAGE	сст	MRP	
7.5W per Feet	Tunable	POR	

## **Linear Beta**








WATTAGE	сст	MRP	
7.5W per Feet	Tunable	POR	

## **Linear Gama**

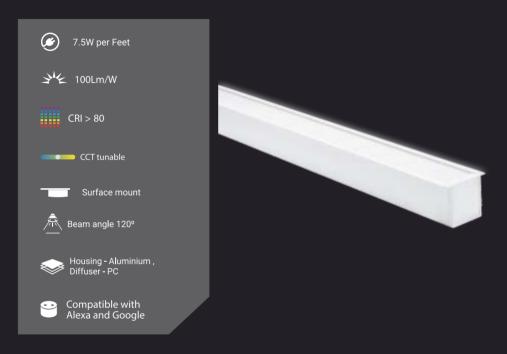

WATTAGE	сст	MRP
7.5W per Feet	Tunable	POR



#### **C'NNECT Smart Bridge Series for CCT Spotlights & Downlights**

C'NNECT Smart Bridge Series 42.30 CCT/ 42.60 CCT

Particulars	15W driver	30W driver	60W driver	100W driver	200W driver
Item Code	CTSD50W3053	CTSB030TCCT	CTSB060TCCT	CTSD50W3054	CTSD50W3055
I/P Voltage Range	140-280V	140-295V AC	140-295V AC	100-277V	140-277V
I/P Current @240V	65mA	135mA	280mA	420mA	840mA
O/P constant Voltage	42V	41-42V DC	41-42V DC	42V	42V
Rated O/P Load Current	300mA	640mA Max	1.3A Max	2280mA	4760mA
Dimensions	116*36*23mm	116.3*36*23mm	143.3*43*30mm	200*63*36mm	244*72*37mm
Driver Box Material	Plastic ABS	Plastic ABS	Plastic ABS	Metal	Metal
Surge Protection	4KV	4KV	4KV	4KV	4KV

#### **C'NNECT Smart Bridge Series for RGB Strip lights**

C'NNECT Smart Bridge Series 24.50 RGB/ 24.100 RGB

0 1111201 5111a112	Tree in the straight series 2 fles it est, 2 fles ites					
Particulars	50W driver	100W driver				
tem Code	CTSB050TRGB	CTSB050TRGB		-		
I/P Voltage Range	140-295V AC	140-295V AC		14	44.14	Landers Page
I/P Current @240V	232mA	232mA				2
O/P constant Voltage	23-24V DC	23-24V DC			27 %	- 49 E
Rated O/P Load Current	2A Max	2A Max				
Dimensions	143.3*43*30mm	143.3*43*30mm				
Driver Box Material	Plastic ABS	Plastic ABS				
Surge Protection	4KV	4KV				
				A STATE OF THE PARTY OF THE PAR		

#### **C'NNECT Smart Bridge Series for CCT Strip lights**

C'NNECT Smart Bridge Series 24.50 CCT/ 24.100 CCT



Particulars	50W driver	100W driver
Item Code	CTSB050TCCT	CTSB050TCCT
I/P Voltage Range	140-295V AC	140-295V AC
I/P Current @240V	232mA	232mA
Wattage	50	100
O/P constant Voltage	23-24V DC	23-24V DC
Rated O/P Load Current	2A Max	2A Max
Dimensions	143.3*43*30mm	143.3*43*30mm
Driver Box Material	Plastic ABS	Plastic ABS
Surge Protection	4KV	4KV



#### **MAGIK C'NNECT Smart Hub for Strip Lights CNNECT Smart RGB Controller**

Input DC Voltage Range O/P Load Wattage

24V-45V DC Upto 200W Max

- · Connected with many lights
- Reduces Network Load
- Can be used even when internet is down
- Easy installation
- Can be used from anywhere

#### **MAGIK C'NNECT Smart Hub for Spotlights and Downlights**

#### **CNNECT Smart CCT Controller**

Input DC Voltage Range O/P Load Wattage

24V-45V DC Upto 200W Max

- Connected with many lights
- Reduces Network Load
- Can be used even when internet is down
- Easy installation
- Can be used from anywhere





- Works through Radio Frequency
- 4 buttons On, Off, Dim+, Dim-
- Long range operation works from a maximum distance of 50 ft. and does not require line of sight operation
- Enables control of up to three groups of lights with different settings
- Can control the scene settings
- No line of sight is required



# MAGIK C'NNECT



SMART CONTROLLER NO HUB REQUIRED



BRIGHTNESS AND COLOUR CONTROL



REMOTE CONTROL



#### **Terms & Conditions**

- 1. MRP prices are inclusive of GST (GST No: 19AACCC7275Q1ZV; HSN code for LED Only: 94054090).
- 2. All prices are subject to Century LED Limited general terms & conditions of business.
- 3. This Price List supersedes all earlier Price Lists.
- 4. Prices are subject to change without notice.
- 5. Prices of all LED luminaires in this Price List are for standard luminaires.
- 6. Century LED Limited reserves the right to make continuous design and data improvement. Thus, data provided may change without any prior intimation. Customers are advised to reconfirm the data or product dimensions before purchase with our local offices.
- 7. Company reserves the right to issue amendments, which may arise due to any errors in the Price List.
- 9. Goods are dispatched by us on Purchaser's risk. All claims for loss, damage or shortage will be filed by the Purchasers directly with the carriers.
- 10. Warranty voids for LED fixtures including drivers, if individual points of installations are not provided with proper earthing.
- 11. All orders shall be placed in writing.
- 12. All rights reserved. Reproduction in whole or in part is prohibited.
- 13. Subject to Kolkata Jurisdiction only.

Care has been taken to ensure that the information contained within is correct. However, owing to continuous innovations and improvements the actual product when supplied, may differ from the details given herein. Photographs shown herein are indicative. Please check with nearest sales office for the actual product.

CENTURY LED LTD. reserves the rights to make changes in the data / details without prior notice.

# presenting a new and innovative way to light your home right!



To give you a visual experience of how a lighting plan will beautify your home, Magik presents LEDpedia. It's an innovative platform where you can simply pick the size of the room and try different lighting options before choosing the best one. Saving on your time, LEDpedia provides a close-to-real view of the best lighting solutions.

For any other variant / requirement please get in touch.

www.magiklights.com/ledpedia







Century House, 3rd Floor, Plot P15/1 Taratala Road, Kolkata - 700 088 (Near Taratala Police Station)

#### **REGISTERED OFFICE & FACTORY ADDRESS**

Century LED Limited Srijan Industrial Logistic Park, Part - B Block - A, 1st Floor, N.H. - 06 Bombay highway, Howrah - 711302, W.B.

www.magiklights.com

FROM THE PROMOTERS OF CENTURY PLY













To know more: 18003451345 | helpdesk@magiklights.com